



Ultra-Low-Noise Current Amplifier

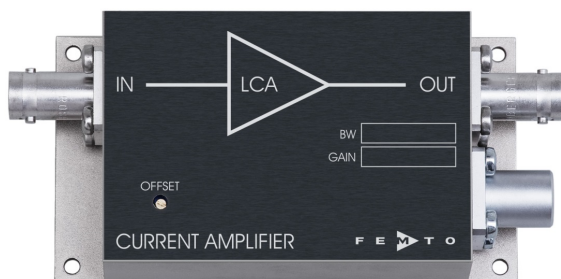

Features	• Bandwidth and Frequency Response Independent of Detector-Capacitance (up to 10 nF) • Extremely Low Noise, 10 fA/√Hz Equivalent Input Noise Current • Bandwidth DC ... 10 kHz • Transimpedance (Gain) 5×10^8 V/A	
Applications	• Photodiode- and Photomultiplier-Amplifier • Spectroscopy • Charge-Amplifier • Ionisation Detectors • Preamplifier for Lock-Ins, A/D-Converters, etc.	
Specifications	Test Conditions	$V_s = \pm 15$ V, $T_a = 25^\circ\text{C}$
Gain	Transimpedance	5×10^8 V/A (>10 k Ω Load)
	Accuracy	$\pm 1\%$
Frequency Response	Lower Cut-Off Frequency	DC
	Upper Cut-Off Frequency	10 kHz (-3 dB)
	Rise- / Fall-Time	40 μs (10% - 90%)
	Gain Flatness	± 0.1 dB
Input	Equ. Input Noise Current	10 fA/√Hz (@ 1 kHz)
	Equ. Input Noise Voltage	5 nV/√Hz (@ 1 kHz)
	Input Bias Current	2 pA typ.
	Input Bias Current Drift	Factor 1.7 / 10 K
	Offset Current Compensation	± 6 nA, Adjustable by Offset-Trimpot
	Max. Input Current	± 20 nA (Linear Amplification)
	Input Offset Voltage	< 1 mV
	DC Input Impedance	50 Ω (Virtual) // 5 pF
Output	Output Voltage	± 10 V (>10 k Ω Load)
	Output Impedance	50 Ω (Terminate with >10 k Ω for best Performance)
	Max. Output Current	± 10 mA (Linear Amplification)
Power Supply	Supply Voltage	± 15 V
	Supply Current	± 40 mA typ.
Case	Weight	210 gr. (0.5 lbs)
	Material	AlMg4.5Mn, nickel-plated
Temperature Range	Storage Temperature	$-40 \dots +100^\circ\text{C}$
	Operating Temperature	$0 \dots +60^\circ\text{C}$

Ultra-Low-Noise Current Amplifier

Absolute Maximum Ratings	Input Voltage	$\pm 5\text{ V}$
	Power Supply Voltage	$\pm 22\text{ V}$
Connectors	Input	BNC
	Output	BNC
	Power Supply	LEMO Series 1S, 3-pin Fixed Socket
	Pin 1:	+ 15V
	Pin 2:	- 15V
	Pin 3:	GND



Application Diagrams

Photo Detector Biasing in Photovoltaic Mode:
Use for Low Speed Applications and Minimum Dark Current.



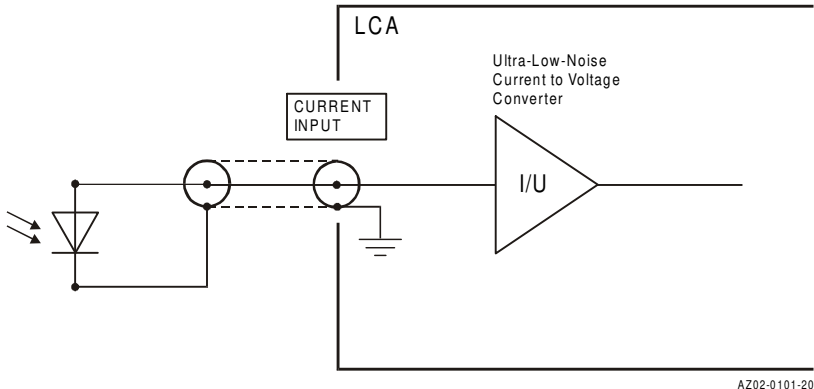


Photo Detector Biasing in Photoconductive Mode:
Use for Fast Applications and if More Dark Current is Tolerable.
Bias Voltage Decreases Detector Capacitance.

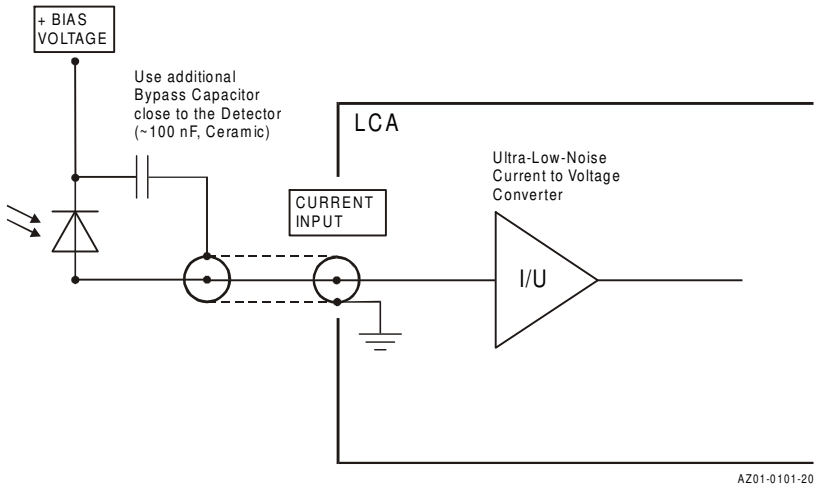

Ultra-Low-Noise Current Amplifier

Dimensions

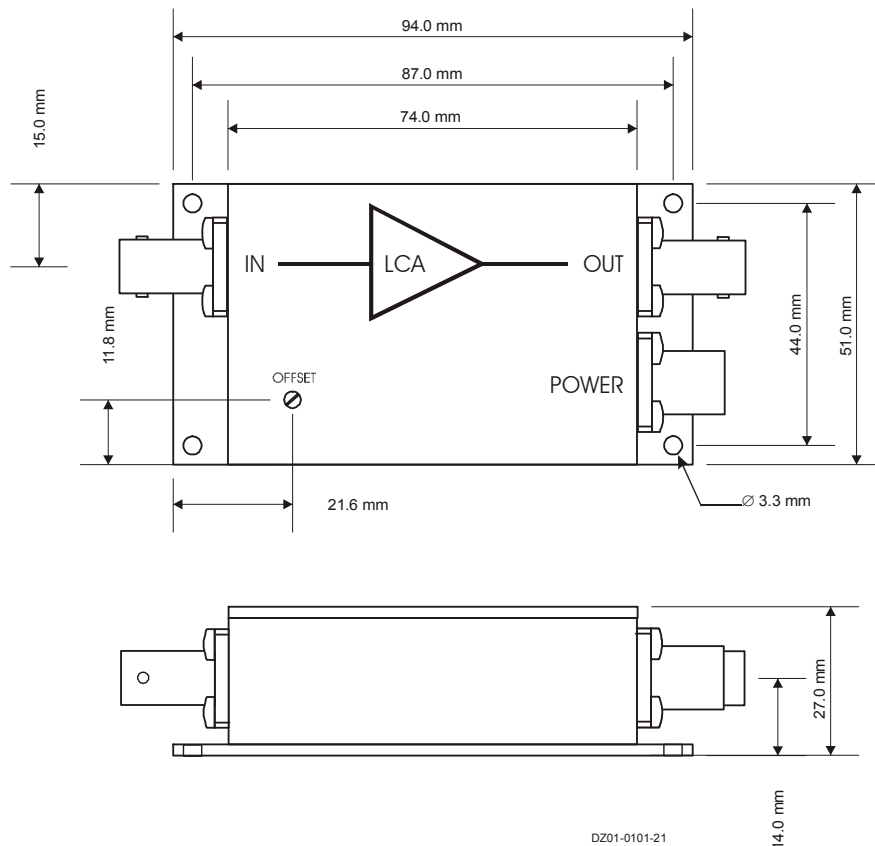

FEMTO Messtechnik GmbH
Klosterstr. 64
10179 Berlin · Germany
Phone: +49 30 280 4711-0
Fax: +49 30 280 4711-11
Email: info@femto.de
www.femto.de

Specifications are subject to change without notice. Information provided herein is believed to be accurate and reliable. However, no responsibility is assumed by FEMTO Messtechnik GmbH for its use, nor for any infringement of patents or other rights of third parties which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of FEMTO Messtechnik GmbH. Product names mentioned may also be trademarks used here for identification purposes only.

© by FEMTO Messtechnik GmbH · Printed in Germany