

780nm 10mW 70°C Reliable Operation

Features


Low operating current
High efficiency
Better power budget for optical design

Applications

Industrial Tools

Absolute maximum ratings

Parameter	Symbol	Condition	Rating	Unit
Light output power	P_O	CW	12	mW
Reverse voltage (LD)	V_{RL}	—	2	V
Case temperature	T_C	—	-10 ~ +70	°C
Storage temperature	T_S	—	-40 ~ +85	°C

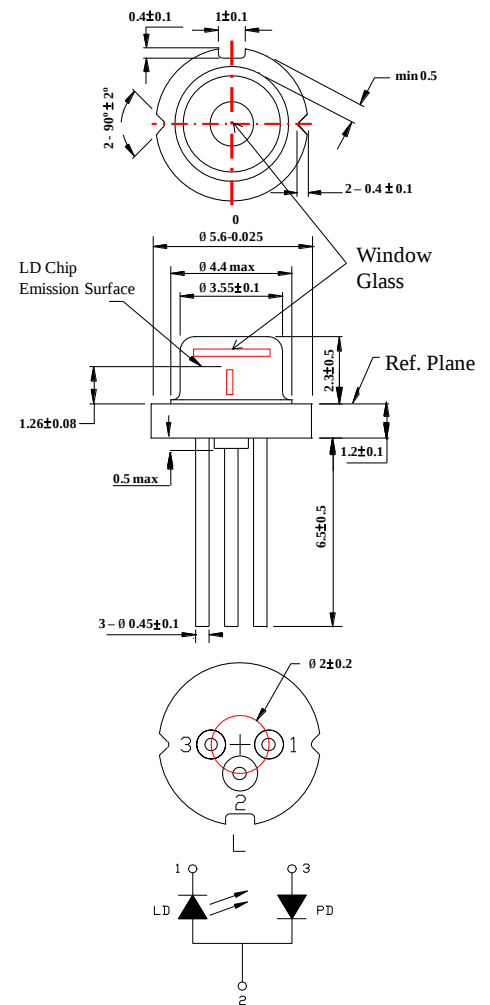

Electrical and optical characteristics ($T_C=25^\circ\text{C}$)

Parameter	Symbol	Min.	Typ.	Max.	Unit	Conditions
Peak wavelength	λ	770	780	790	nm	$P_O=10\text{mW}$
Threshold current	I_{th}	—	15	25	mA	
Operating current	I_{op}	—	30	40	mA	$P_O=10\text{mW}$
Operating voltage	V_{op}	—	1.9	2.2	V	$P_O=10\text{mW}$
Differential efficiency	η	0.4	0.6	0.8	mW/mA	$P_O=7\text{-}10\text{mW}$
Monitor current	I_m	0.2	0.6	1.2	mA	$P_O=10\text{mW}$ $V_{RD}=5\text{V}$
Parallel divergence angle	$\theta_{ }$	7	11	15	deg.	$P_O=10\text{mW}$
Perpendicular divergence angle	$\theta_{\perp}$	24	28	32	deg.	
Parallel FFP deviation angle	$\Delta\theta_{ }$	-2	0	+2	deg.	
Perpendicular FFP deviation angle	$\Delta\theta_{\perp}$	-3	0	+3	deg.	
Emission point accuracy	$\Delta x\Delta y\Delta z$	-80	0	+80	um	

● Precautions

- * Do not operate the device above maximum ratings. Doing so may cause unexpected and permanent damage to the device.
- * Take precautions to avoid electrostatic discharge and/or momentary power spikes. A change in the characteristics of the laser or premature failure may result.
- * Proper heat sinking of the device assures stability and lifetime. Always ensure that maximum operating temperatures are not exceeded.
- * Observing visible or invisible laser beams with the human eye directly, or indirectly, can cause permanent damage. Use a camera to observe the laser.
- * No laser device should be used in any application or situation where life or property is at risk in event of device failure.
- * Specifications are subject to change without notice. Ensure that you have the latest specification by contacting us prior to purchase or use of the product.

780nm 10mW 70°C Reliable Operation

