


## 808 nm Grating Stabilized TO Can Laser Diode, 500 mW

LD808-SEV500



### Description

The LD808-SEV500 808 nm, Single-Frequency TO-Can Laser Diode is based on quantum well epitaxial layer growth and a highly reliable ridge waveguide structure with external volume holographic grating (VHG) feedback. This single-transverse mode laser diode features high optical output power and produces a wavelength stabilized spectrum with a single frequency narrow linewidth over the operating power range of approximately 400 to 500 mW. Contained in a Ø9 mm package, the LD808-SEV500 laser is ideal for Raman spectroscopy, instrumentation, second harmonic generation and pumping applications. This diode can be custom ordered for a wider wavelength-stabilized temperature range.

### Specifications


LD808-SEV500 Absolute Maximum Ratings	
LD Reverse Voltage (Max)	2 V
Absolute Max Current	800 mA
Absolute Max Power	510 mW
Operating Temperature	0 to 50 °C <sup>a</sup>
Storage Temperature	-10 to 65 °C
Pin Code	E




LD808-SEV500 <sup>b</sup>				
	Symbol	Min	Typical	Max
Center Wavelength	$\lambda_c$	806 nm	808 nm	810 nm
Single Frequency Output Power <sup>c</sup> (CW @ $I_{CW}$ and $T_{CS}$ )	$P_{CW-SF}$	450 mW	500 mW	-
Single Frequency Power Range	$\Delta P_{SF}$	100 mW <sup>d</sup>	-	-
Operating Current (CW)	$I_{CW}$	-	-	800 mA
Center Temperature for $\Delta T_{stabilized}$	$T_{CS}$	15 °C	-	30 °C
Wavelength Stabilized Temperature Range	$\Delta T_{stabilized}$	5 °C	-	-
Threshold Current	$I_{TH}$	-	200 mA	250 mA
Side Mode Suppression Ratio (SMSR)	SMSR	25 dB	40 dB	-
Forward Voltage	$V_F$	-	2.2 V	2.8 V
Slope Efficiency at 25 °C	$\Delta P / \Delta I$	-	0.8 W/A	-
Laser Linewidth	$\Delta \nu$	-	10 MHz	-
Transverse Beam Divergence Angle (FWHM)	$\theta_T$	-	14°	20°
Lateral Beam Divergence Angle (FWHM)	$\theta_L$	-	8°	10°

- The wavelength-stabilized temperature range typically spans a minimum of 5 °C centered on a temperature between 15 °C and 30 °C. This specification is given for each device on the unit-specific data sheet. When operated outside of the operating temperature range the laser diode will no longer be wavelength stabilized.
- In order to achieve the specified performance, we recommend using the TCLDM9 Laser Diode Mount and, when collimated, an NIR optical Isolator; single frequency performance when collimated is only guaranteed with >30 dB isolation of back reflections.
- This value is the upper limit of the range where the diode can produce single frequency output and varies from laser to laser. The performance of each individual laser can be found on the unit-specific data sheet.
- This value is specified for temperatures in the range given by  $T_{CS} \pm 1/2 T_{stabilized}$ . The 100 mW minimum single frequency power range corresponds to output powers between the typical  $P_{CW-SF} - \Delta P_{SF}$  and  $P_{CW-SF}$ , i.e., between 400 mW and 500 mW.


## Typical Performance Plots

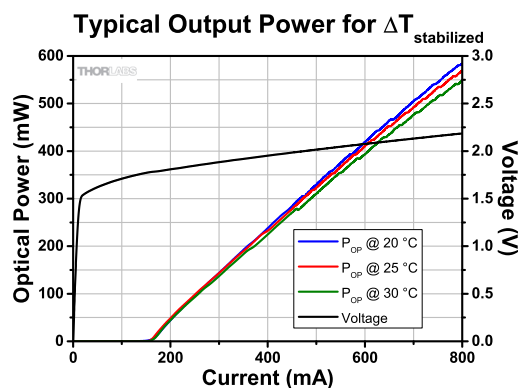


The typical output power vs. current is shown for four temperatures within the wavelength stabilized temperature range ( $\Delta T_{\text{stabilized}}$ )\* of a LD808-SEV500 laser diode.

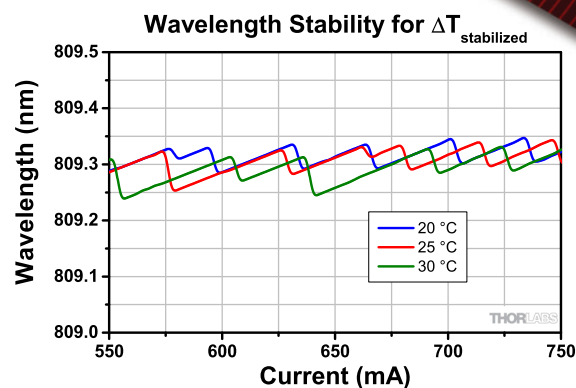


When used within the wavelength stabilized temperature range ( $\Delta T_{\text{stabilized}}$ )\*, the LD808-SEV500 shows excellent wavelength stability over a range of drive currents.

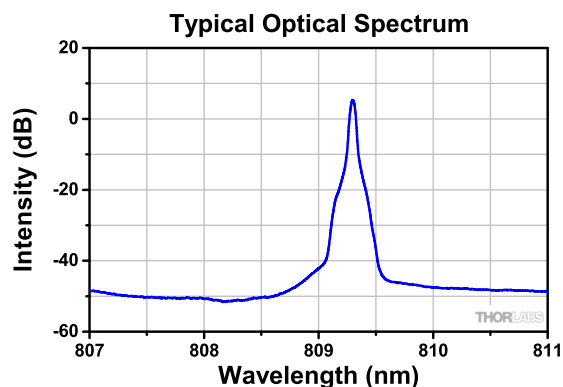

The typical optical spectrum is shown above. The data was obtained with a 750 mA drive current and the device held at 25 °C.

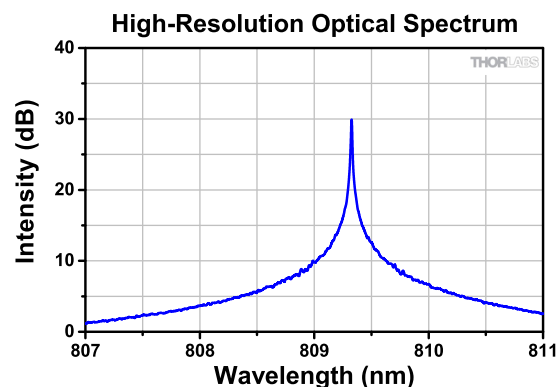



This high-resolution optical spectrum is obtained using one of Thorlabs' Optical Spectrum Analyzers (OSA201), which provides 8 pm resolution at 808 nm.

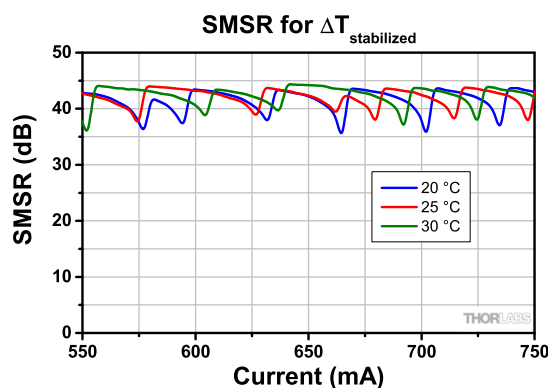

The typical side mode suppression ratio (SMSR) is shown for three temperatures within the wavelength stabilized temperature range ( $\Delta T_{\text{stabilized}}$ )\*.

\* For each LD808-SEV500 laser, graphs of output power vs. current, wavelength stability and SMSR for  $T_{\text{stabilized}}$  will be provided on the item-specific data sheet.

## Typical Performance Plots Cont.

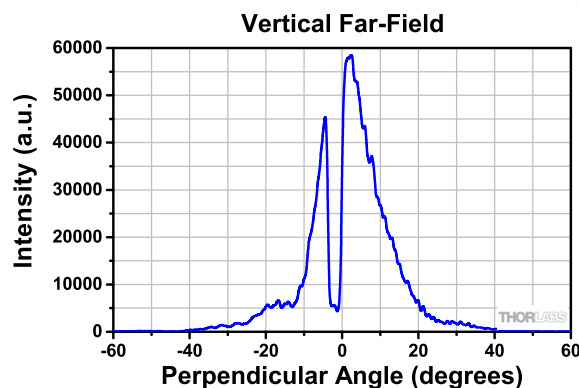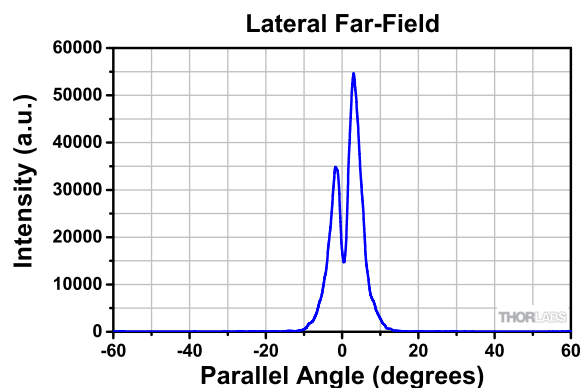

The diverging beam from the laser chip freely propagates through the external volume holographic grating (VHG), while the light in the center of the beam is reflected back into the chip. This results in a stabilized wavelength emitting from the laser and also creates a dark spot in the far field, as shown in the graphs above. These were measured with a current of 750 mA.

## Drawing

