

## Lms23LED series

Heterostructure LED matched to GaSb substrate.

Features	Applications
<ul style="list-style-type: none"> <li>• Low power consumption;</li> <li>• High response time;</li> <li>• Long lifetime;</li> <li>• Available in various packages;</li> <li>• RoHS compliant</li> </ul>	Optical sensors and analysers (for example, for plastic thickness control)



### Standard models

Model	Package <sup>1</sup>
Lms23LED	TO-18 with a cap WITHOUT a glass window
Lms23LED-R	TO-18 with a reflector WITHOUT a glass window
Lms23LED-RW	TO-18 with a reflector with a glass window
Lms23LED-TEM	TO-5 with a built-in thermocooler and thermistor, with a cap with a glass window
Lms23LED-TEM-R	TO-5 with a built-in thermocooler and thermistor, with a reflector with a glass window
Lms23LED-CS3020	SMD 3x2 mm (without encapsulation/ glass window)

<sup>1</sup> Package hermeticity is not tested and is not guaranteed.

### Absolute maximum ratings (at ambient temperature $T_a = +25^\circ\text{C}$ , unless otherwise stated)

Model	Maximum operating current		Operating/ storage temperature <sup>4</sup> , T <sub>op</sub> /T <sub>stg</sub>	Soldering temperature (t = 3 s, ≥3 mm from the case), T <sub>sol</sub>
	qCW mode <sup>2</sup> , I <sub>qCW</sub>	pulse mode <sup>3</sup> , I <sub>pul</sub>		
Lms23LED	0.25 A	2 A	-60..+90 °C	+260 °C
Lms23LED-R				
Lms23LED-RW				
Lms23LED-TEM				
Lms23LED-TEM-R			+5..+90 °C	
Lms23LED-CS3020			-60..+90 °C	-

<sup>2</sup> qCW mode: repetition rate: 0.5 KHz, pulse duration: 1 ms, duty cycle: 50%.

<sup>3</sup> Pulse mode: repetition rate: 0.5 KHz, pulse duration: 20  $\mu\text{s}$ , duty cycle: 1%.

<sup>4</sup> No dew condensation.

### Optical and electrical parameters (at ambient temperature $T_a = +25^\circ\text{C}$ , unless otherwise stated)



Model	Peak emission wavelength, $\lambda_p$ , $\mu\text{m}$	FWHM of the emission band, nm	Optical power		Forward voltage (0.2 A), V, V	
			average (0.2 A, qCW <sup>2</sup> ), $P_{qCW}$ , mW	peak (1 A, имп. <sup>3</sup> ), $P_{pul}$ , mW		
	min - max	min - max	min	min	min - max	
Lms23LED	2.30-2.39	170-270	$\geq 0.3$	$\geq 3$	0.5-2.5	
Lms23LED-R						
Lms23LED-RW						
Lms23LED-TEM			$\geq 0.2$	$\geq 2$		
Lms23LED-TEM-R						
Lms23LED-CS3020						

Typical thermocooler and thermistor parameters (for "TEM", "TEM-R" models)<sup>5</sup>


Parameter	Value	Comments
<b>Thermocooler (Peltier element)</b>		
Maximum current, $I_{\text{max}}$ , A	$1.5 \pm 0.08$	at $\Delta T_{\text{max}}$
Maximum voltage drop, $U_{\text{max}}$ , V	$0.85 \pm 0.05$	
Maximum temperature difference at $I=I_{\text{max}}$ , $\Delta T_{\text{max}}$ , K	$70 \pm 2$	at $Q_{\text{max}}=0$ , at other Q: $T=\Delta T_{\text{max}}(1-Q/Q_{\text{max}})$
Maximum heat pumping capacity at $I=I_{\text{max}}$ , $Q_{\text{max}}$ , W	$0.72 \pm 0.04$	at $\Delta T=0$ , at other $\Delta T$ : $Q=Q_{\text{max}}(1-\Delta T/\Delta T_{\text{max}})$
<b>Thermistor</b>		
NTC thermistor type	TC103	
Resistance nominal, R, kOhm	$10.0 \pm 0.5$	at $T=25^\circ\text{C}$
$\beta$ -constant, $\text{K}^{-1}$	$3380 \pm 35$ (or $3435 \pm 85$ , or $4250 \pm 85$ )	

<sup>5</sup> For actual parameters please refer to the technical data provided with the exact ordered LEDs.


Typical LED spectra (qCW<sup>2</sup>)

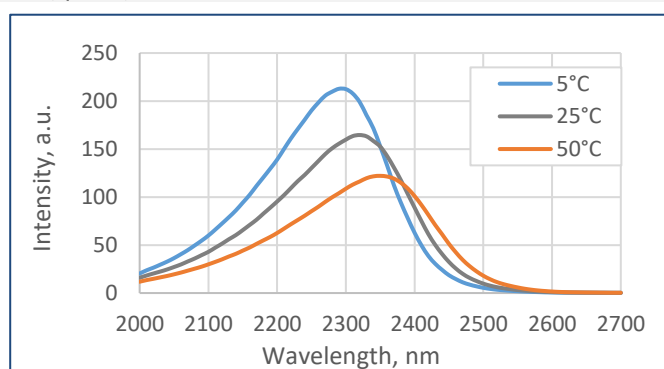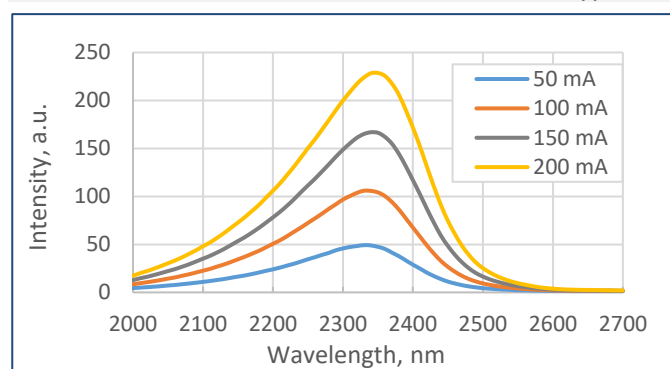

Typical optical power - current characteristic (qCW<sup>2</sup>)

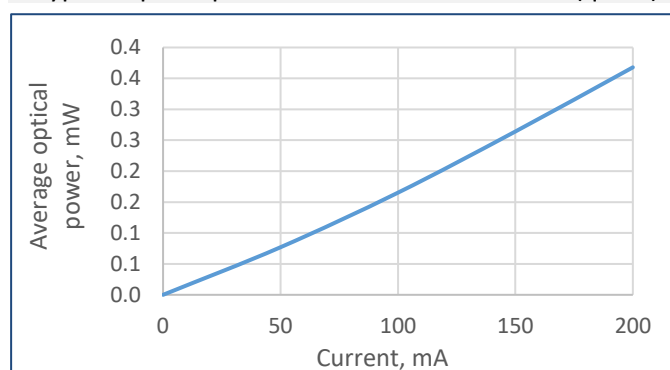

Typical current-voltage characteristic (qCW<sup>2</sup>)

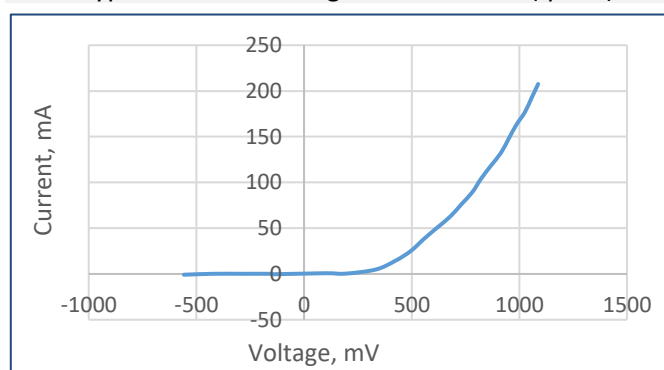


<sup>2</sup> qCW mode: repetition rate: 0.5 KHz, pulse duration: 1 ms, duty cycle: 50%.

## Typical radiation patterns of different LED models


**Lms23LED**

TO-18 with a cap WITHOUT a glass window

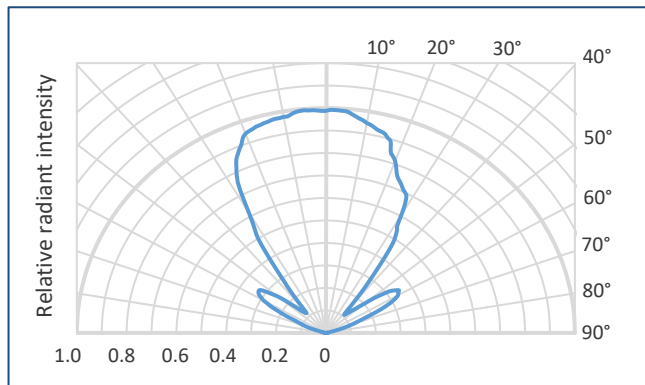


**Lms23LED-R/ Lms23LED-RW**

TO-18 with a reflector without/ with a glass window

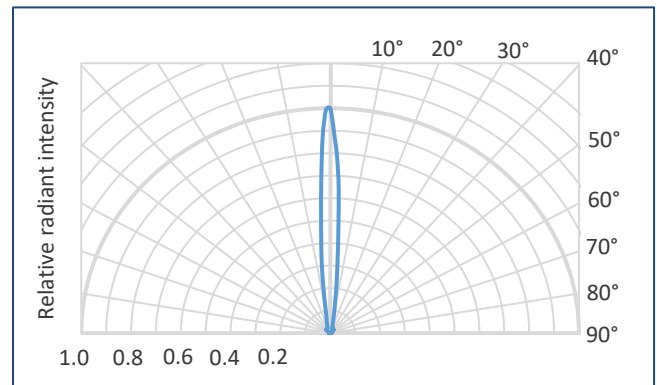


**Lms23LED-TEM**

TO-5 with a built-in thermocooler and thermistor, with a cap with a glass window

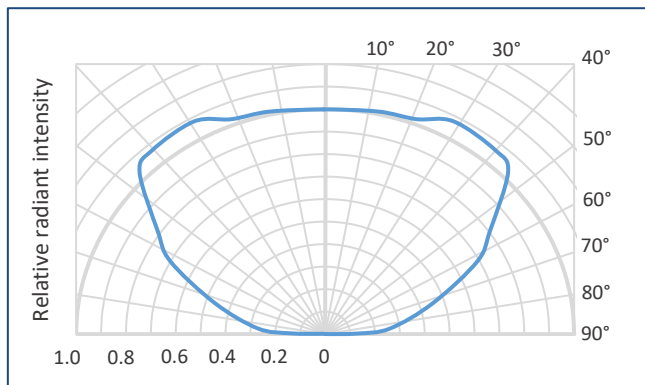


**Lms23LED-TEM-R**

TO-5 with a built-in thermocooler and thermistor, with a reflector with a glass window

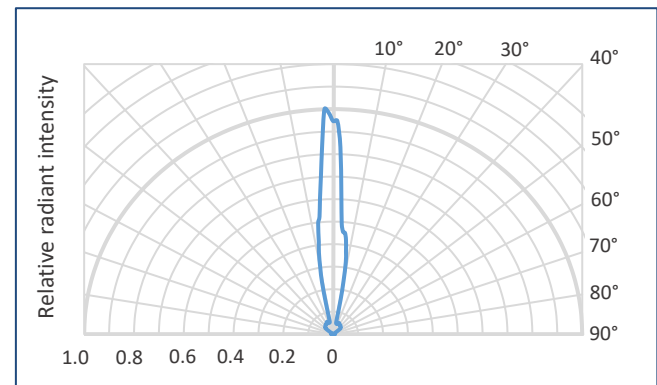


**Lms23LED-CS3020**

SMD 3x2 mm (without encapsulation/ glass window)

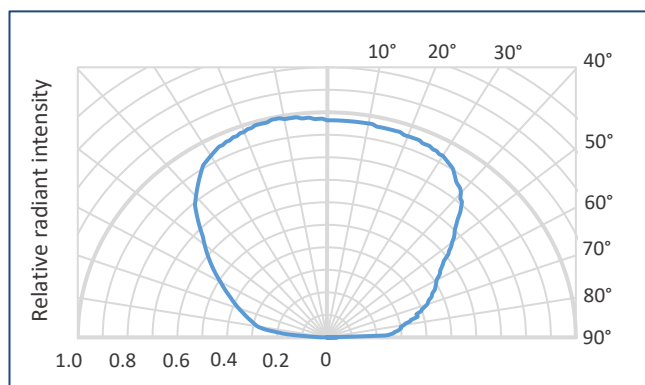


## LED connecting and driving

### LED basic circuit connection

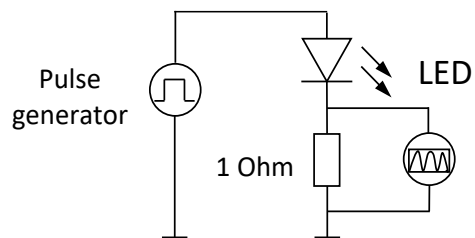


### LED with thermoelectric module basic circuit connection

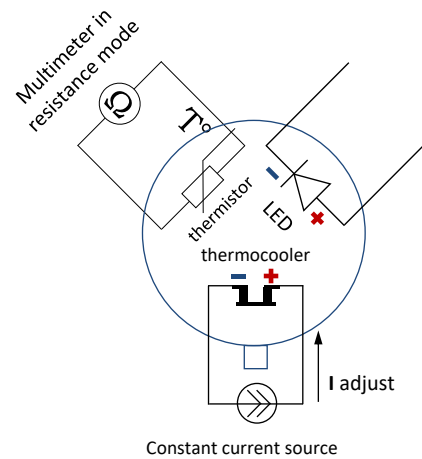


We recommend using **Quasi Continuous Wave (qCW) mode** with a duty cycle 50% or 25% to obtain maximum average optical power and short **Pulse modes** to obtain maximum peak power. Hard CW (continuous wave) mode is NOT recommended.

### Quasi Continuous Wave (qCW) mode

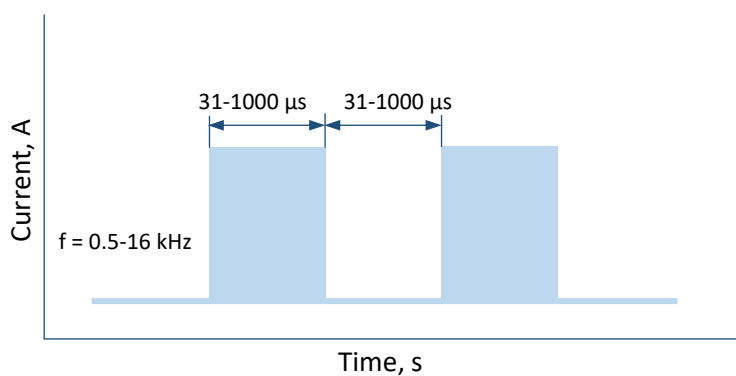


### Pulse mode

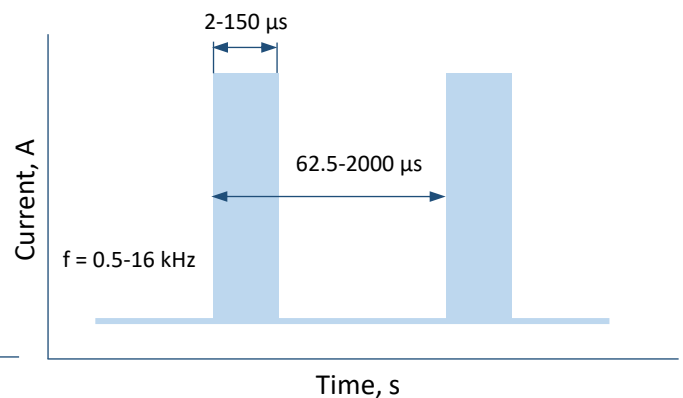


## Technical Drawings

### Lms23LED

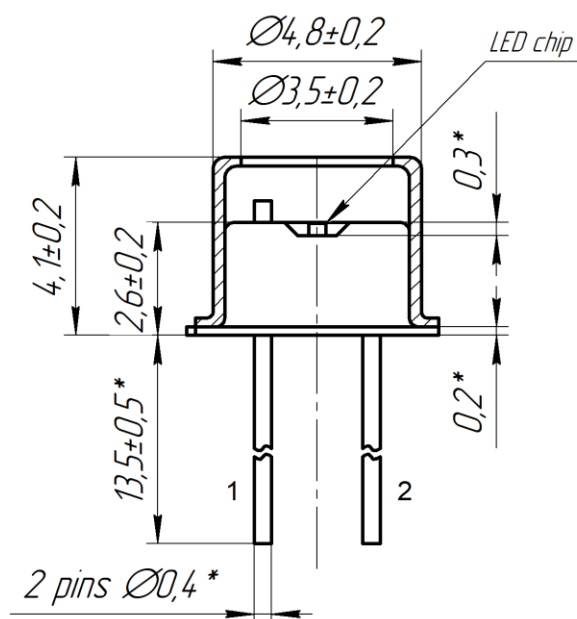

Top view

LED pinout:  
 1 - electrically isolated from the case -  
*cathode*<sup>1</sup>  
 2 - electrically connected to the case -  
*anode*<sup>1</sup>

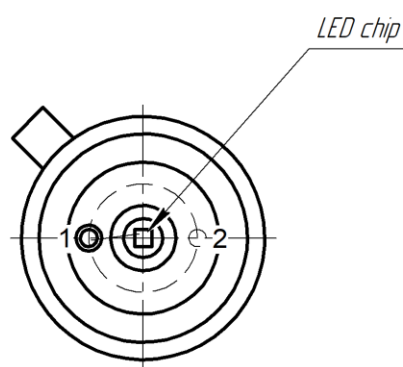


Bottom view

<sup>1</sup> For LED polarity (*anode* and *cathode*) please refer to the technical data provided with the exact ordered LEDs.  
 LED *anode* is marked with a *RED* dot.

\*Reference dimensions.  
 All dimensions are pointed in mm.

## Technical Drawings

### Lms23LED-R

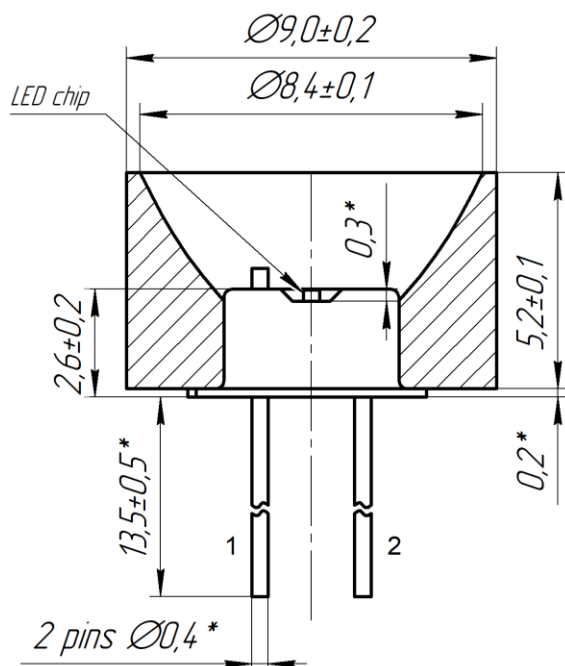

Top view


LED pinout:

1 - electrically isolated from the case -  
*cathode*<sup>1</sup>

2 - electrically connected to the case -  
*anode*<sup>1</sup>



Bottom view

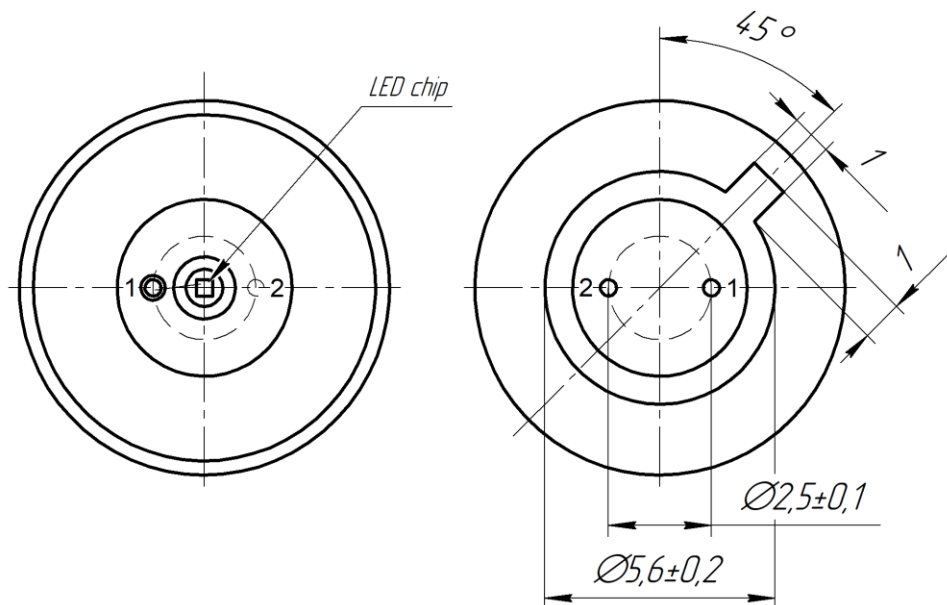


<sup>1</sup> For LED polarity (*anode* and *cathode*) please refer to the technical data provided with the exact ordered LEDs.  
LED *anode* is marked with a *RED* dot.

\*Reference dimensions.

All dimensions are pointed in mm.

## Technical Drawings

### Lms23LED-RW

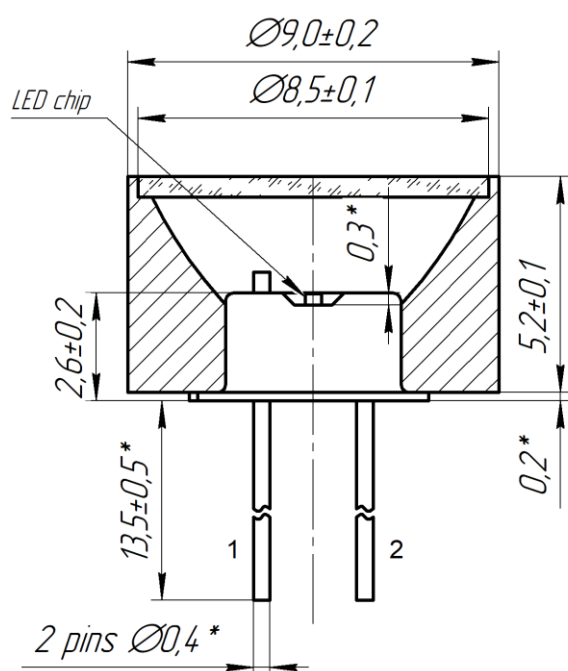

Top view


LED pinout:

1 - electrically isolated from the case -  
*cathode*<sup>1</sup>

2 - electrically connected to the case -  
*anode*<sup>1</sup>



Bottom view

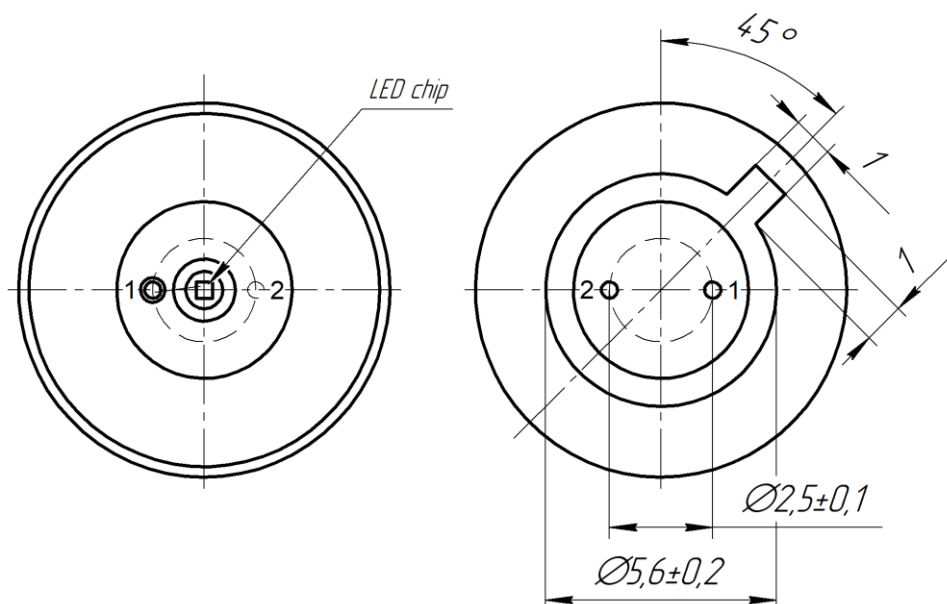


<sup>1</sup> For LED polarity (*anode* and *cathode*) please refer to the technical data provided with the exact ordered LEDs.  
LED *anode* is marked with a *RED* dot.

\*Reference dimensions.


All dimensions are pointed in mm.

## Technical Drawings

### Lms23LED-TEM

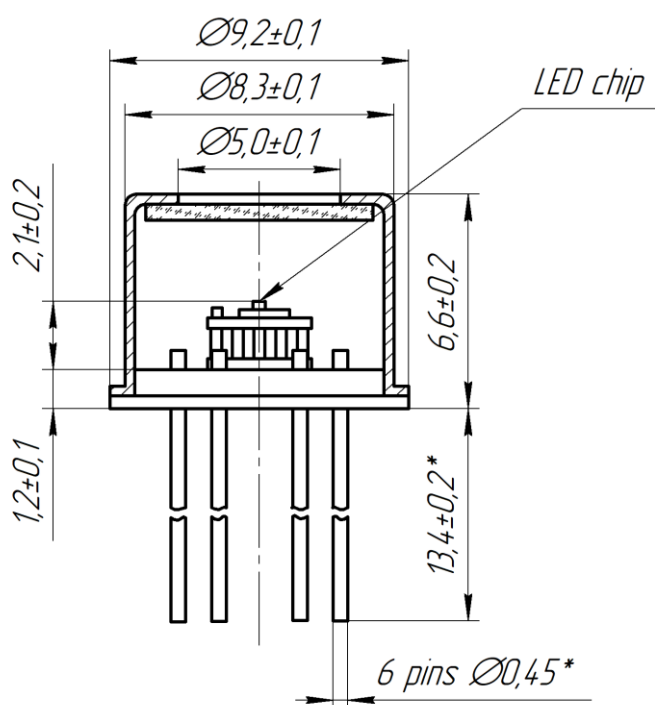

LED pinout:  
 1 – thermocooler +  
 2 – LED anode  
 3 – LED cathode  
 4 – thermistor  
 5 – thermistor  
 6 – thermocooler –  
 (all pins are electrically isolated from the case)

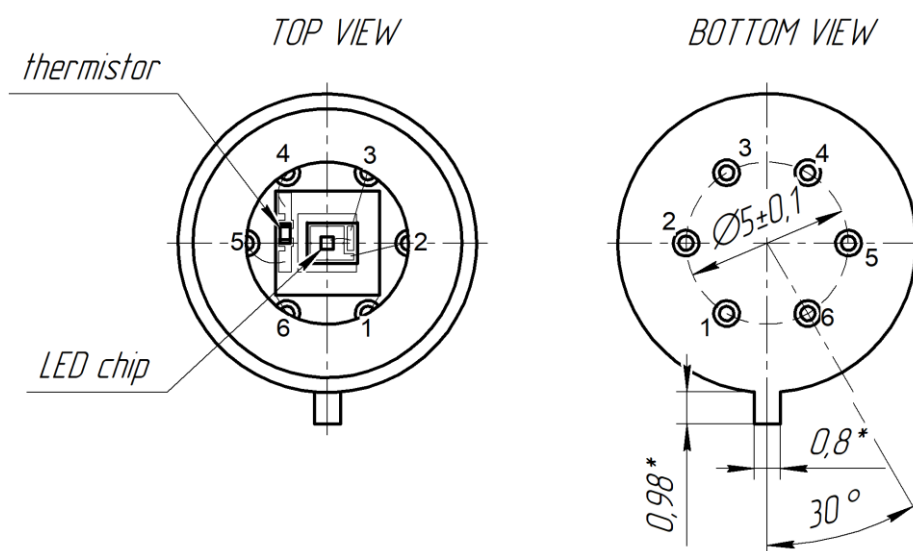


LED anode is marked with a RED dot, cathode – with a BLUE dot.

\*Reference dimensions.  
 All dimensions are pointed in mm.




## Technical Drawings

### Lms23LED-TEM-R

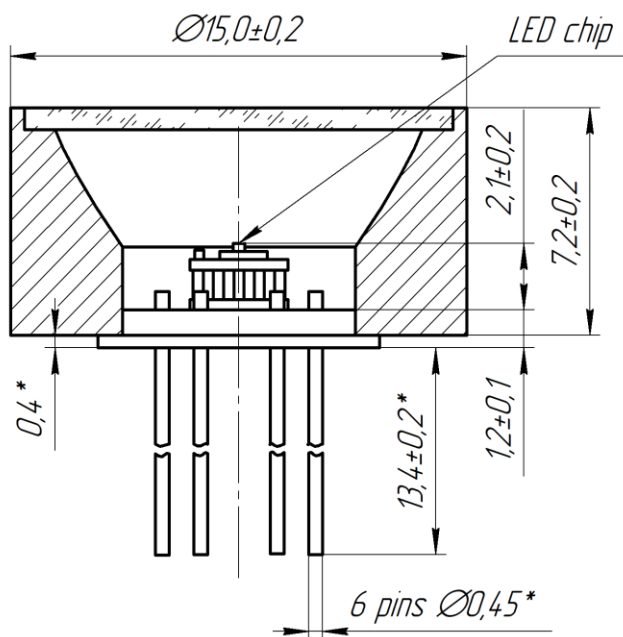


LED pinout:  
 1 - thermocooler +  
 2 - LED **anode**  
 3 - LED **cathode**  
 4 - thermistor  
 5 - thermistor  
 6 - thermocooler -  
 (all pins are electrically isolated from the case)

TOP VIEW

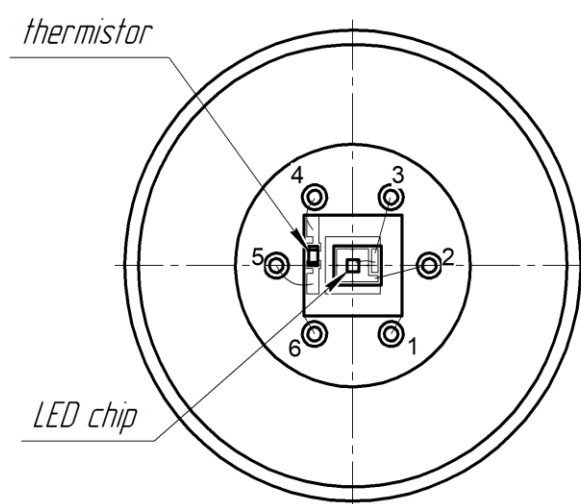

BOTTOM VIEW

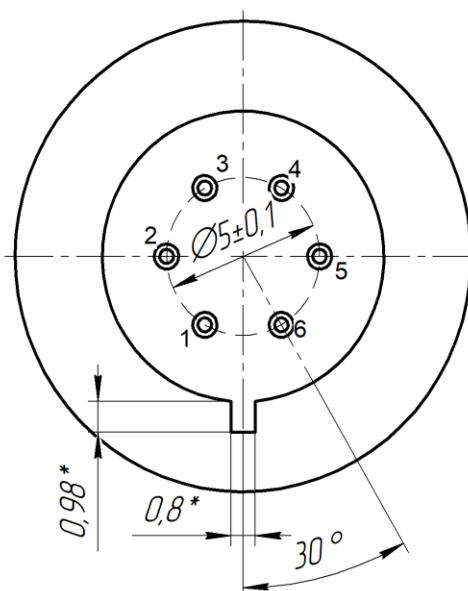


LED **anode** is marked with a **RED** dot, **cathode** - with a **BLUE** dot.

\*Reference dimensions.  
 All dimensions are pointed in mm.

## Technical Drawings

### Lms23LED-CS3020

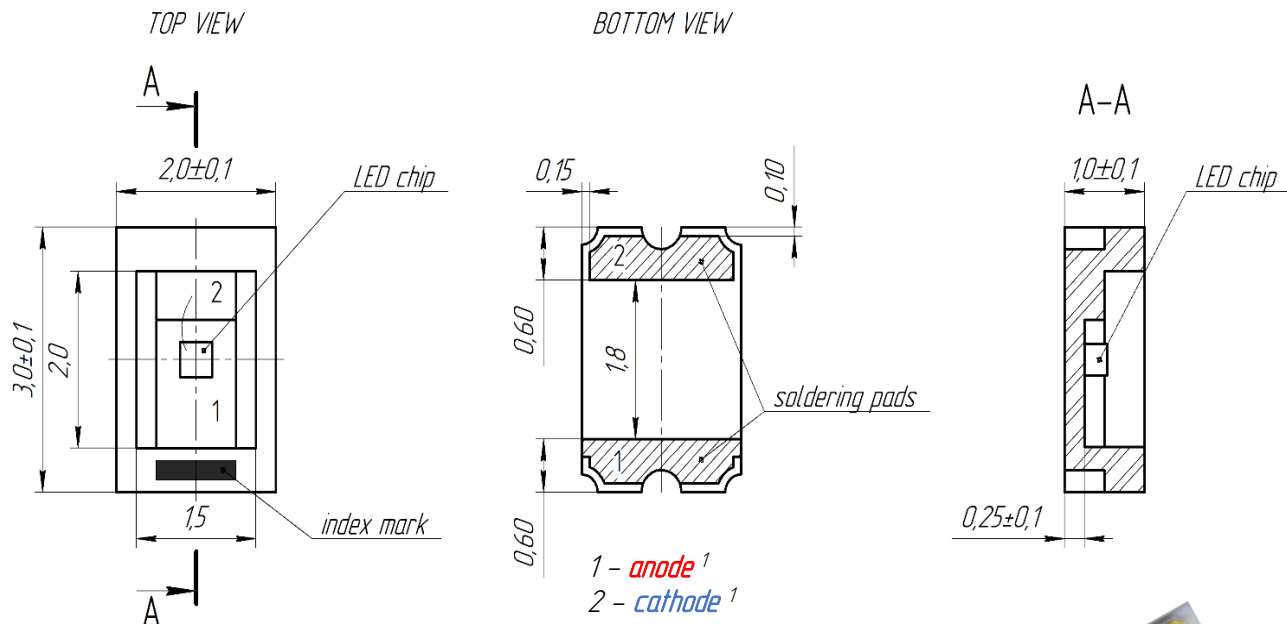


<sup>1</sup> For LED polarity (anode and cathode) please refer to the technical data provided with the exact ordered LEDs.


Package -  $\text{Al}_2\text{O}_3$  ceramics, WITHOUT encapsulation; soldering pads - gold plated.  
All dimensions are pointed in mm.

### Recommended IR reflow soldering profiles for Lms23LED-CS3020

for lead containing soldering

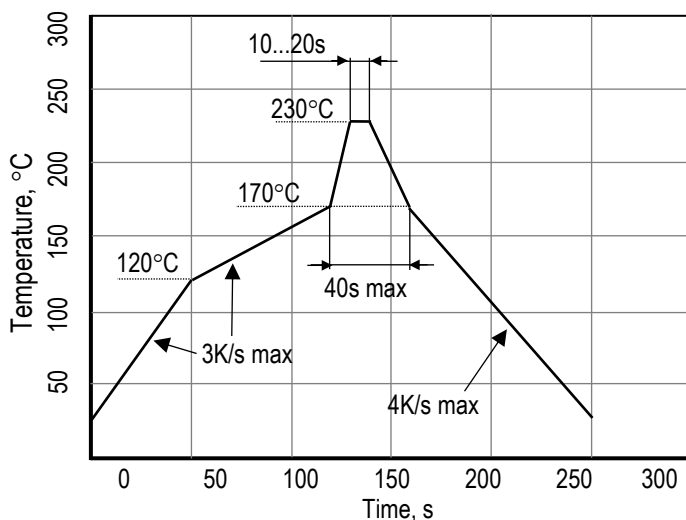

for lead free soldering

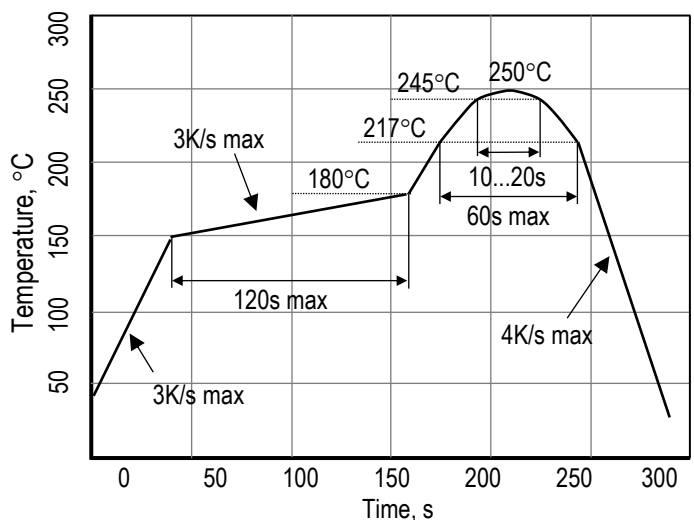

**IMPORTANT CAUTIONS & NOTES**

- Please mind the LED polarity (pointed in the technical data provided with the ordered LEDs). For TO-packaged LEDs anode is marked with a red dot.
- Please check your connection circuit before turning on the LED.
- Please control the CURRENT applied to the LED in order NOT to EXCEED the maximum allowable values pointed in the technical data provided with the LED.

Please do NOT connect the LED to the multimeter.

- REVERSE voltage applying is FORBIDDEN.
- For "TEM"/ "TEM-R" LED models please control the current and voltage applied to the thermocooler in order NOT to EXCEED the maximum allowable values pointed in the technical data provided with the LED.
- For "TEM"/ "TEM-R" LED models with thermocooler please provide effective heat dissipation from the package. LEDs are mounted on the cold side of thermocooler (Peltier element), hot side is mounted on TO-5 header, it is important to provide good conditions for dissipating heat from the hot side to avoid overheating of thermocooler and the LED, otherwise, they may be damaged.
- Violating LED package integrity is forbidden.
- Handle LED with care, avoid mechanical damaging that may occur due to physical impact (for example, because of the falling down). For LED models without glass window/ glass covering be carefull in order not to damage the wire contact and crystal.
- The typical data and estimations of technical parameters can only reflect statistical figures. These do not necessarily correspond to the actual parameters of each single product, which could differ from the typical data and estimations.
- LED parameters may vary depending on the usage case, operation conditions, etc. Validation of the parameters, long-term stability of the product must be performed by the user for the exact application.

**WARRANTY CONDITIONS**

**Warranty period:** ONE year after delivery. The Warranty is limited to LED repair or replacement for defects found and reported within one year period.

**Non-warranty cases:** we shall assume no warranty for damages caused by unsuitable or improper use, non-observance of the cautions or by defective or negligent handling. LEDs that reveal any hints of mishandling cannot be replaced, even if this was not the initial reason for returning.

**Related products:**

- **Photodiodes** - detectors of infrared radiation spectrally matched with the LEDs.
- **Electronics** for LED power supply in pulse modes.