

1278nm DFB Laser diode for HF Sensing (TO39 Package)



Description:

The PL-DFB-1278-A-A81-TO39 1278nm DFB laser diode module made by LD-PD is a cost effective, highly coherent laser source. The DFB laser diode chip is packaged in an industry standard hermetically sealed TO39 package with TEC and PD Built in.

Features:

- Narrow Linewidth < 2MHz
- Excellent wavelength control and stability
- Industry Standard TO39 package
- Mode-Hop free tuning
- Excellent reliability
- Customer specific wavelengths available

Application:

- Tunable diode laser absorption spectroscopy
- HF Monitoring


Headquarters: 288, Woolands Loop, #04-00, Singapore 738100

Laser Specifications:

T_{sub}=25°C, CW bias unless stated otherwise


Parameter	Symbol	Min	Typ	Max	Unit
Centre Wavelength	λ	1277.5	1278.0	1278.5	nm
Side Mode Suppression Ratio	SMSR	30	40		dB
Threshold Current	I _{th}		20	30	mA
Operating Current	I _{op}		80	150	mA
Chip output Power	P _f	10	15	30	mW
Quantum Efficiency	η	0.08	0.12		mW/mA
Current Tuning Coefficient	$\Delta\lambda/\Delta I$		0.015		nm/mA
Temperature Tuning Coefficient	$\Delta\lambda/\Delta T$		0.12		nm/K
Forward Voltage	V _f		1.3	2	V
Thermistor Resistance	R _T	9.5	10	10.5	KΩ
Thermistor Temp. Coefficient			-4.4		%/°C
Connector	FC/APC				

Spectrum:

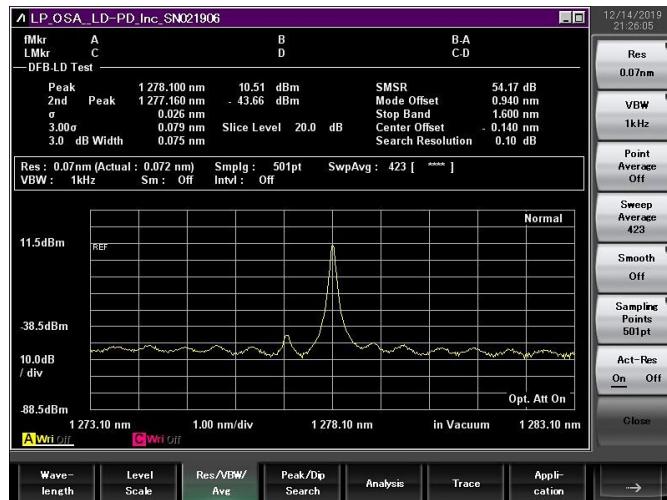


Headquarters: 288, Woolands Loop, #04-00, Singapore 738100


L-I Curve:

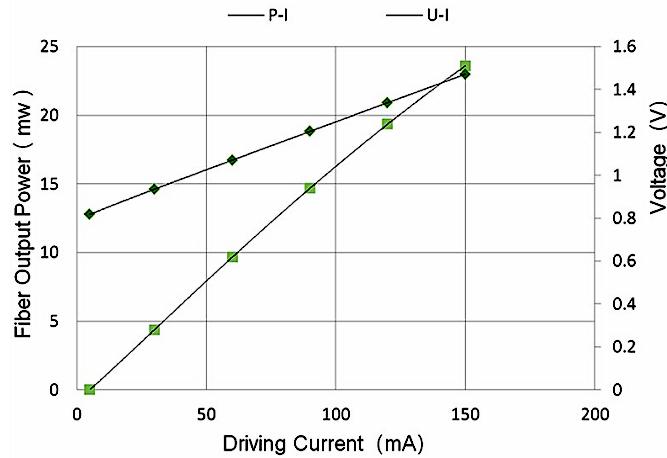


Tuning Characteristics:

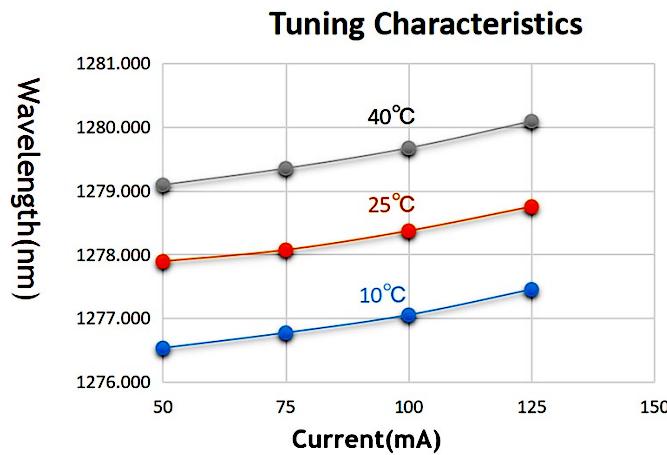


DFB Linewidth Testing Result:

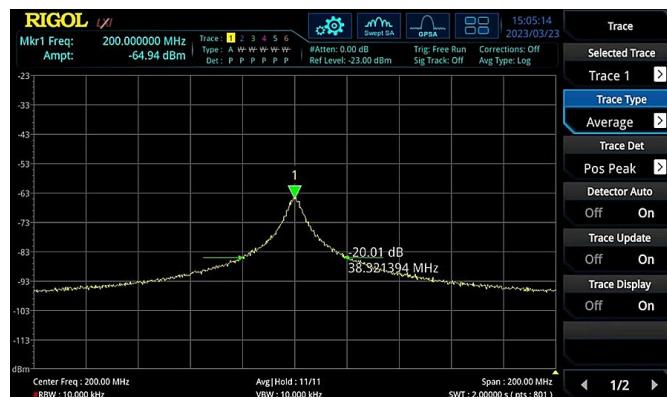


Beam Quality:

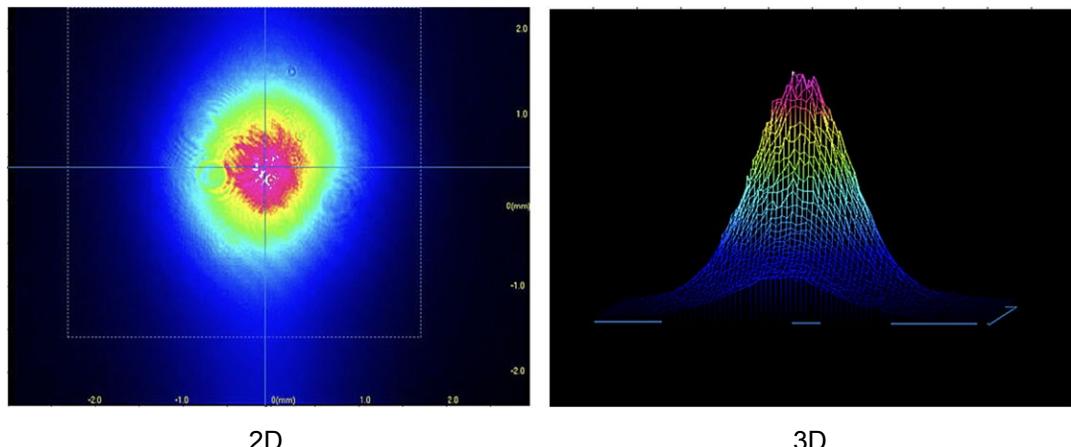

TuninDFB Linewidth Testing Result:

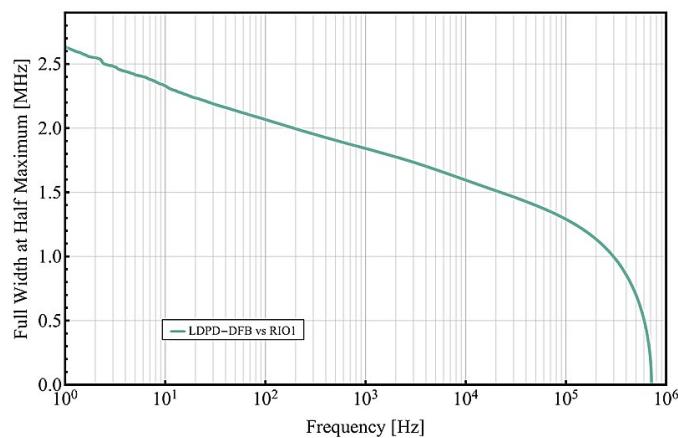


Camera Analysis:

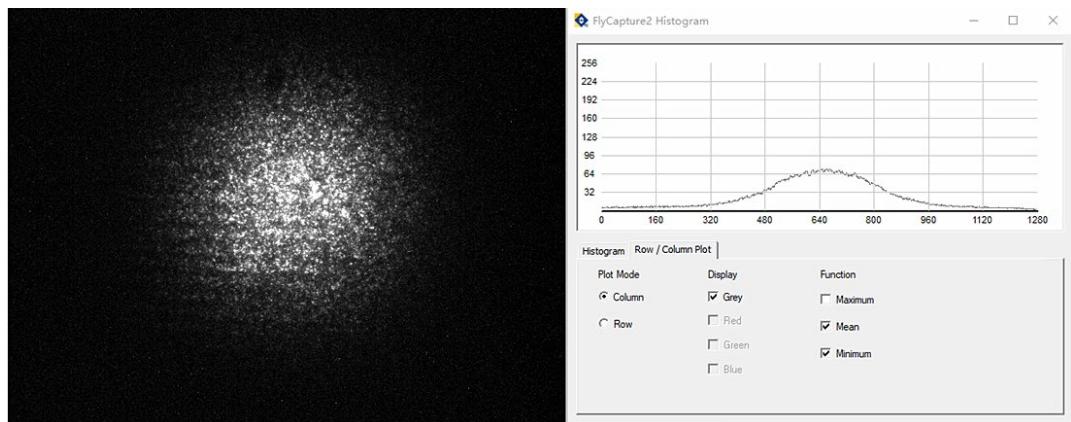

Headquarters: 288, Woolands Loop, #04-00, Singapore 738100



Dimensions and Pin definitions:

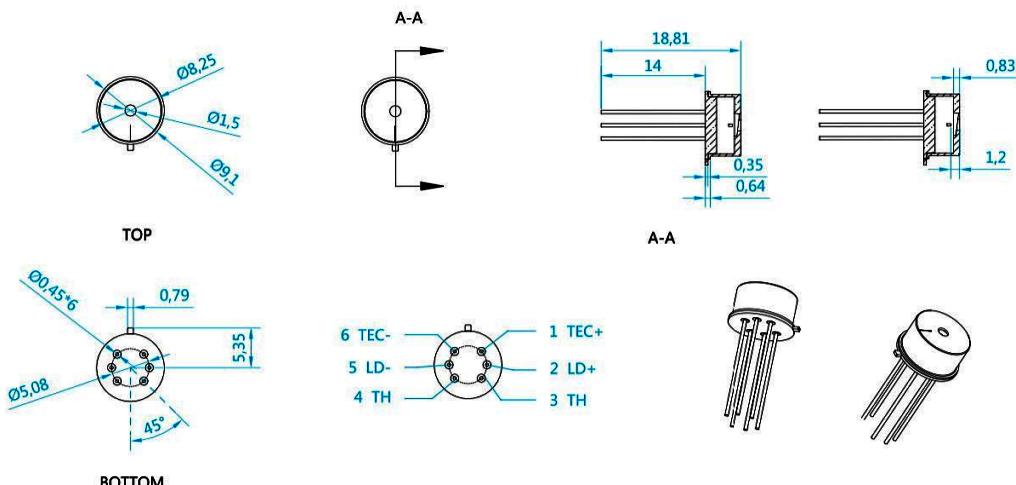


Absolute Maximum Ratings:

Item	Unit	Min	Typ	Max
Case Temperature	°C	-5	25	70
Chip Temperature	°C	+10	25	40
Operating Current	mA	0	100	120
Forward Voltage	V	0.8	1.2	1.8
TEC Current	A	-	-	1.2
Reverse Voltage(LD)	V	-	-	2.0
Reverse Voltage(PD)	V	-	-	20

HF:



TDLAS: 1278/1297/1312nm

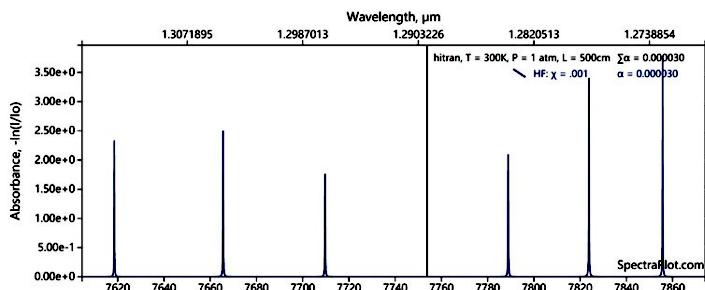

Headquarters: 288, Woolands Loop, #04-00, Singapore 738100

Ordering Info:

PL-DFB-□□□-☆-A8▽-TO39

□□□: Wavelength

1278: 1278nm

1653.7: 1653.7nm

☆ : Output Power

A: 10mW

B: 20mW

▽: Wavelength Tolerance

1: ±1nm

2: ±2nm