


1576nm DFB Laser diode for CO₂ Sensing (TO39 Package)

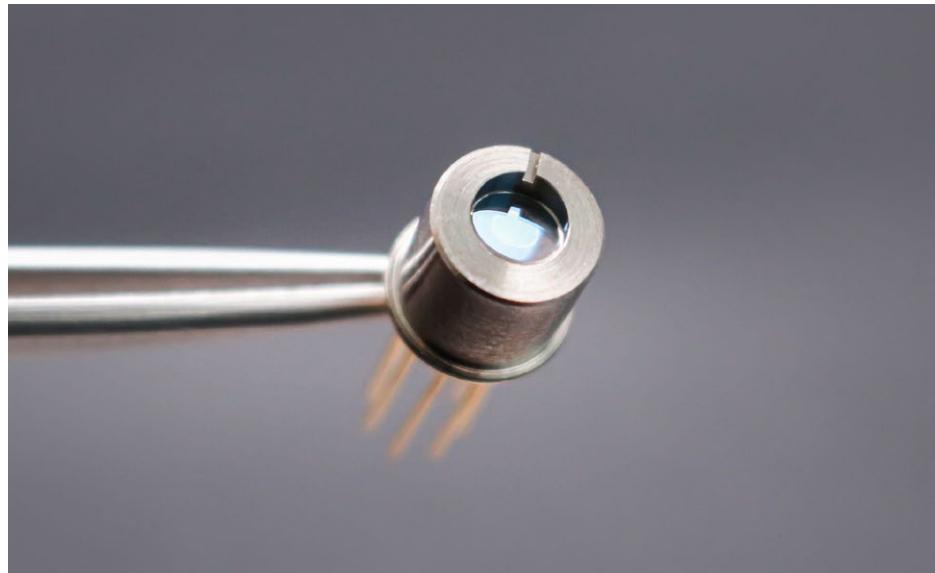

Description:

The PL-DFB-1576-A-A81 1576nm DFB laser diode module made by LD-PD is a cost effective, highly coherent laser source. The DFB laser diode chip is packaged in an industry standard hermetically sealed TO39 package with TEC and PD Built in.

Features:

- Narrow Linewidth < 2MHz
- Excellent wavelength control and stability
- Industry Standard 14 pin Butterfly package
- Mode-Hop free tuning
- Excellent reliability
- Customer specific wavelengths available

Application:

- Tunable diode laser absorption spectroscopy
- CO₂ Monitoring


Headquarters: 288, Woolands Loop, #04-00, Singapore 738100

Laser Specifications:

Electrical/Optical Characteristics (T_{sub}=25°C, CW bias unless stated otherwise)


| Parameter | Symbol | Min | Typ | Max | Unit |
|--------------------------------|--------------------------|--------|--------|--------|-------|
| Centre Wavelength | λ | 1575.5 | 1576.0 | 1576.5 | nm |
| Side Mode Suppression Ratio | SMSR | 30 | 40 | | dB |
| Threshold Current | I _{th} | | 20 | 30 | mA |
| Operating Current | I _{op} | | 80 | 120 | mA |
| output Power | P _f | 10 | 15 | 30 | mW |
| Quantum Efficiency | η | 0.08 | 0.12 | | mW/mA |
| Current Tuning Coefficient | $\Delta\lambda/\Delta I$ | | 0.015 | | nm/mA |
| Temperature Tuning Coefficient | $\Delta\lambda/\Delta T$ | | 0.12 | | nm/K |
| Forward Voltage | V _f | | 1.3 | 2 | V |
| Thermistor Resistance | R _T | 9.5 | 10 | 10.5 | KΩ |
| Thermistor Temp. Coefficient | | | -4.4 | | %/°C |

Spectrum:

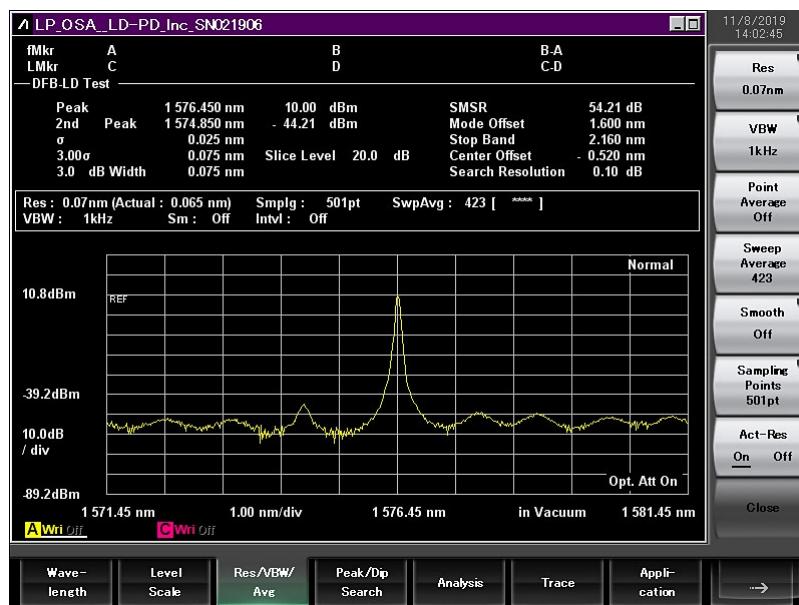


Headquarters: 288, Woolands Loop, #04-00, Singapore 738100

L-I Curve:

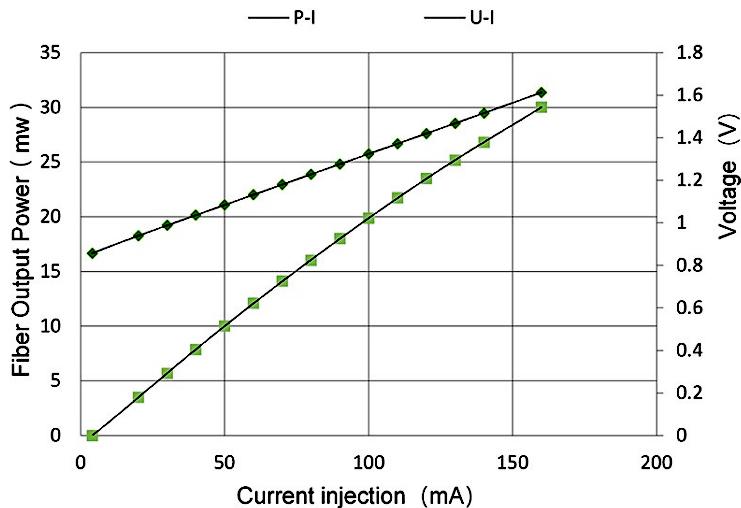

Wavelength Tunable Range:

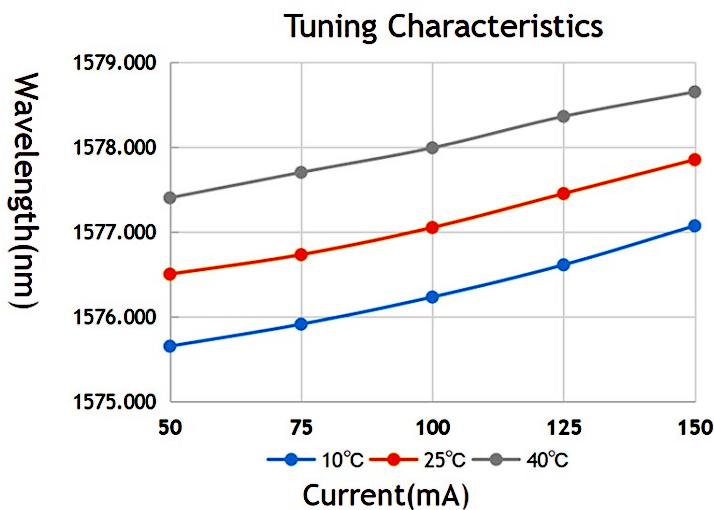


DFB Linewidth Testing Result:




Headquarters: 288, Woolands Loop, #04-00, Singapore 738100

Wavelength Stability:


5mins Wavelength stability Test

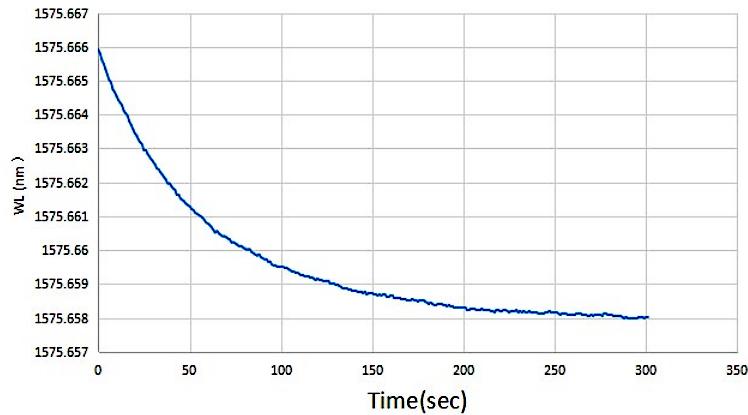

Beam Quality:

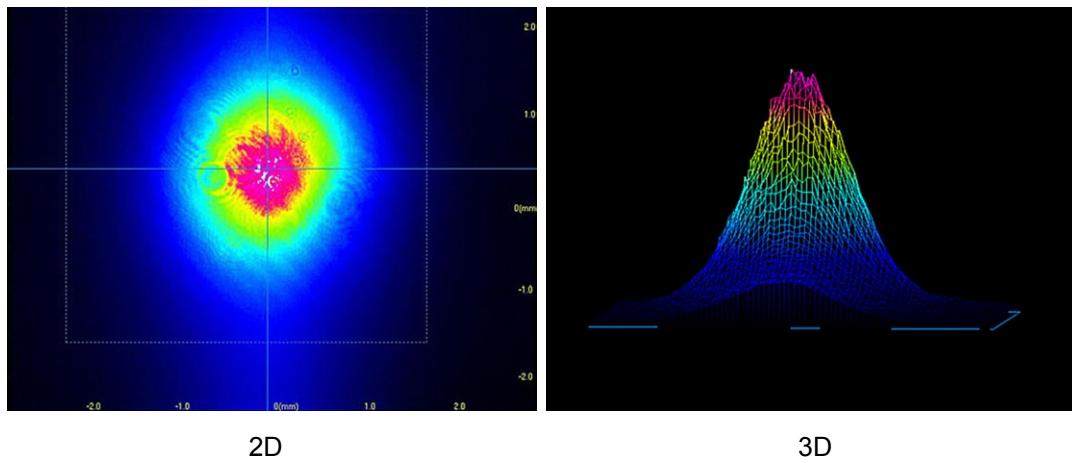


Camera Analysis:

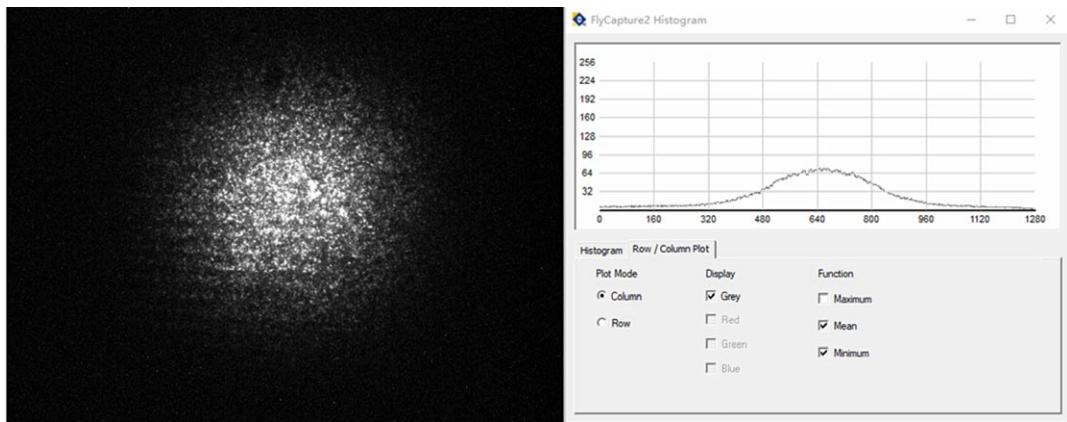

Headquarters: 288, Woolands Loop, #04-00, Singapore 738100

Dimensions and Pin definitions:

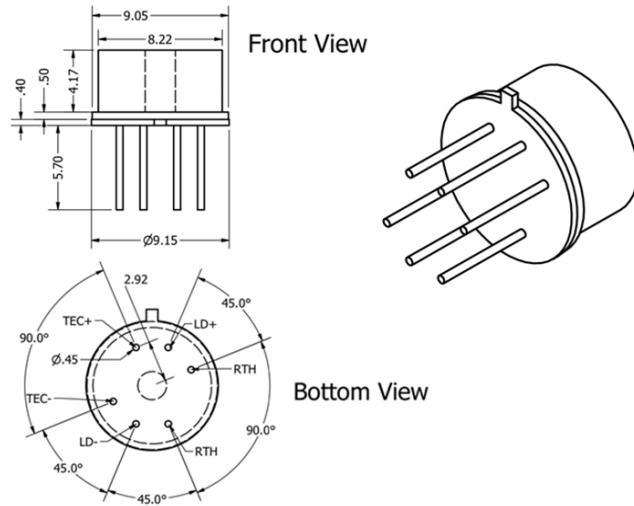

Absolute Maximum Ratings:

| Item | Unit | Min | Typ | Max |
|----------------------|------|-----|-----|-----|
| Case Temperature | °C | -5 | 25 | 70 |
| Chip Temperature | °C | +10 | 25 | 40 |
| Operating Current | mA | 0 | 100 | 120 |
| Forward Voltage | V | 0.8 | 1.2 | 1.8 |
| TEC Current | A | - | - | 1.2 |
| Reverse Voltage (LD) | V | - | - | 2.0 |
| Reverse Voltage (PD) | V | - | - | 20 |

Ordering Info:

PL-DFB-□□□-★-A8∇-TO39

□□□: Wavelength

1530: 1530nm

1576: 1576nm

1653.7: 1653.7nm

★: Output Power

A: 10mW

B: 20mW

∇: Wavelength Tolerance

1: ±1nm

2: ±2nm

Headquarters: 288, Woolands Loop, #04-00, Singapore 738100