



L450G3

Description

This 450 nm, 100 mW laser diode is a compact light source that outputs a single transverse mode and is suited for a variety of applications, such as outdoor and industrial lighting, projection, and visualization. It comes in a Ø3.8 mm TO package with a G pin configuration. This laser diode is compatible with our line of laser diode and TEC controllers as well as our selection of collimation solutions and TO can laser diode mounts.

Specifications

Absolute Maximum Ratings ^a	
Specification	Value
Operating Current	110 mA
LD Reverse Voltage	2 V
Operating Case Temperature	-20 to 70 °C
Storage Temperature	-40 to 85 °C





- a. Absolute maximum rating specifications should never be exceeded. Operating at or beyond these conditions can permanently damage the laser.

L450G3 Specifications ^a					
Specification	Symbol	Min	Typical	Max	
Center Wavelength @ P _{op}	λ_o	440 nm	450 nm	460 nm	
Output Power, CW	P _{op}	100 mW	-	-	
Threshold Current	I _{TH}	-	12 mA	30 mA	
Operating Current CW @ P _{op}	I _{op}	-	80 mA	-	
Operating Voltage @ P _{op}	V _{op}	-	5.2 V	7.0 V	
Slope Efficiency	η	-	1.5 W/A	-	
Modulation Frequency	F	-	>100 MHz	-	
Beam Divergence (FWHM) @ P _{op}	Parallel	$\theta_{ }$	5°	8.4°	10°
	Perpendicular	θ_{\perp}	18°	21.5°	25°


- a. T_{CASE} = 25 °C if not specified.

Performance Plots

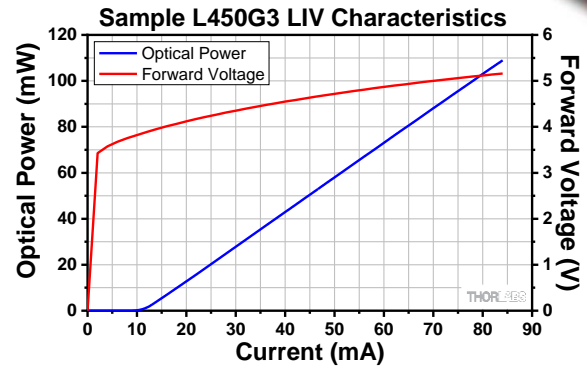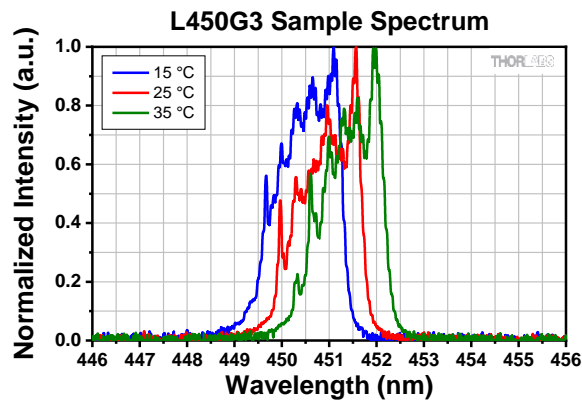


The data presented here is for one particular laser diode. Slight variations in performance data will occur from device to device. The sample spectrum of the L450G3 laser diode was measured at 15 °C, 25 °C, and 35 °C. The L-I-V characteristics data was taken at 25 °C. Please visit our website for raw spectral data and L-I-V characteristics.

Drawings

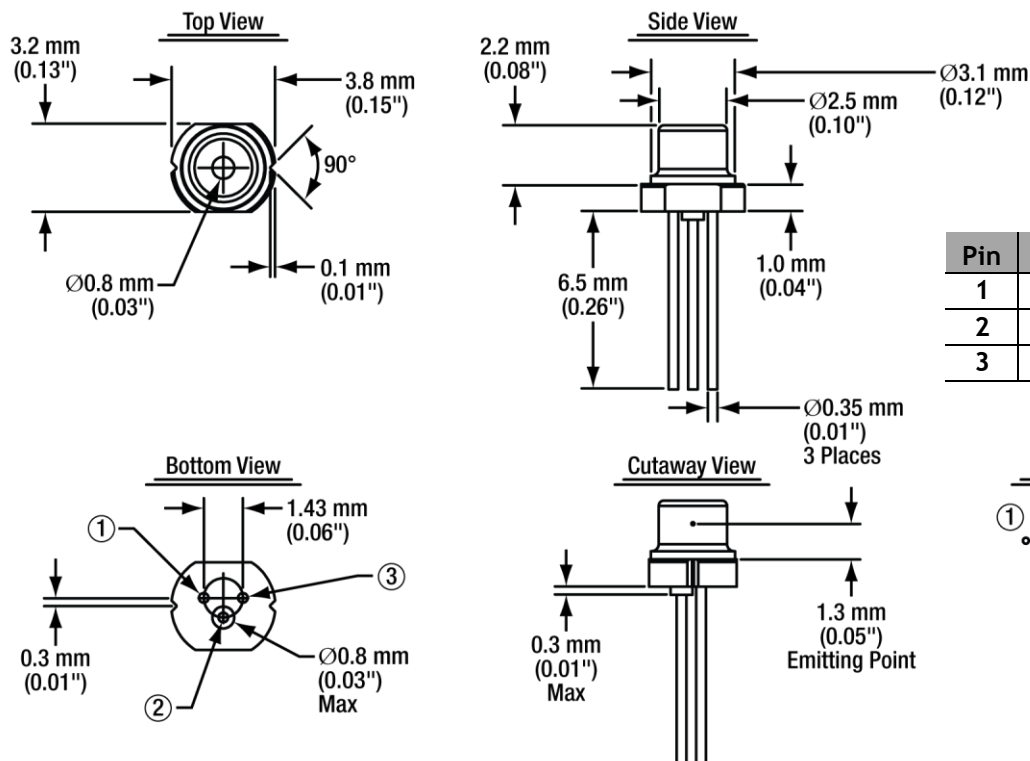

Pin	Description
1	Laser Cathode
2	Case Common
3	Laser Anode



March 7, 2024

QTN055369-S01, Rev A