


1392nm DFB Laser diode for H₂O Sensing (TO39 Package)

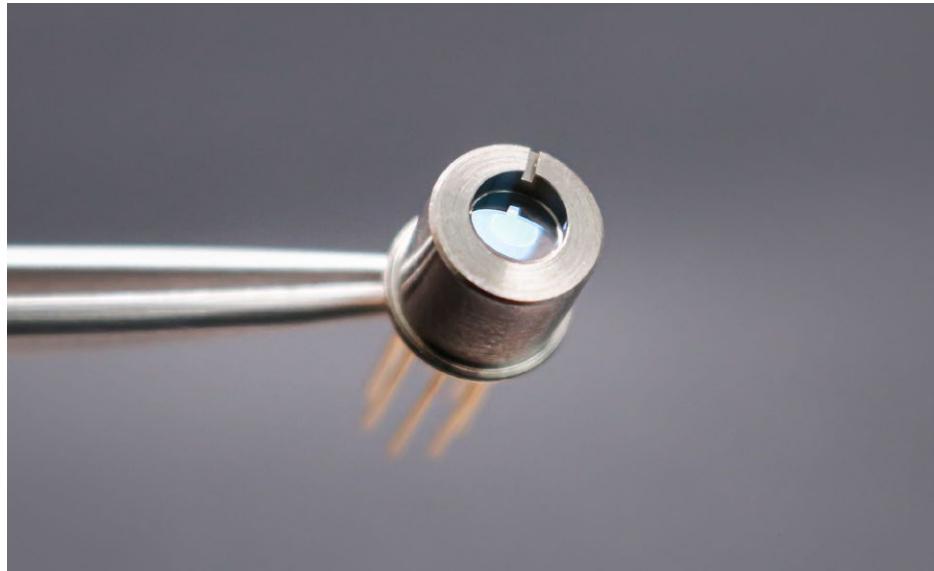

Description:

The PL-DFB-1392-A-A81 1392nm DFB laser diode module made by LD-PD is a cost effective, highly coherent laser source. The DFB laser diode chip is packaged in an industry standard hermetically sealed TO39 package with TEC and PD Built in.

Features:

- Narrow Linewidth < 2MHz
- Excellent wavelength control and stability
- Industry Standard 14 pin Butterfly package
- Mode-Hop free tuning
- Excellent reliability
- Customer specific wavelengths available

Application:


- Tunable diode laser absorption spectroscopy
- H₂O Monitoring

Laser Specifications:


T_{sub}=25°C, CW bias unless stated otherwise

| Parameter | Symbol | Min | Typ | Max | Unit |
|--------------------------------|--------------------------|--------|--------|--------|-------|
| Centre Wavelength | λ | 1391.5 | 1392.0 | 1392.5 | nm |
| Side Mode Suppression Ratio | SMSR | 30 | 40 | | dB |
| Threshold Current | I _{th} | | 20 | 30 | mA |
| Operating Current | I _{op} | | 80 | 120 | mA |
| Chip output Power | P _f | 10 | 15 | 30 | mW |
| Quantum Efficiency | η | 0.08 | 0.12 | | mW/mA |
| Current Tuning Coefficient | $\Delta\lambda/\Delta I$ | | 0.015 | | nm/mA |
| Temperature Tuning Coefficient | $\Delta\lambda/\Delta T$ | | 0.12 | | nm/K |
| Forward Voltage | V _f | | 1.3 | 2 | V |
| Thermistor Resistance | R _T | 9.5 | 10 | 10.5 | KΩ |
| Thermistor Temp. Coefficient | | | -4.4 | | %/°C |


Spectrum:

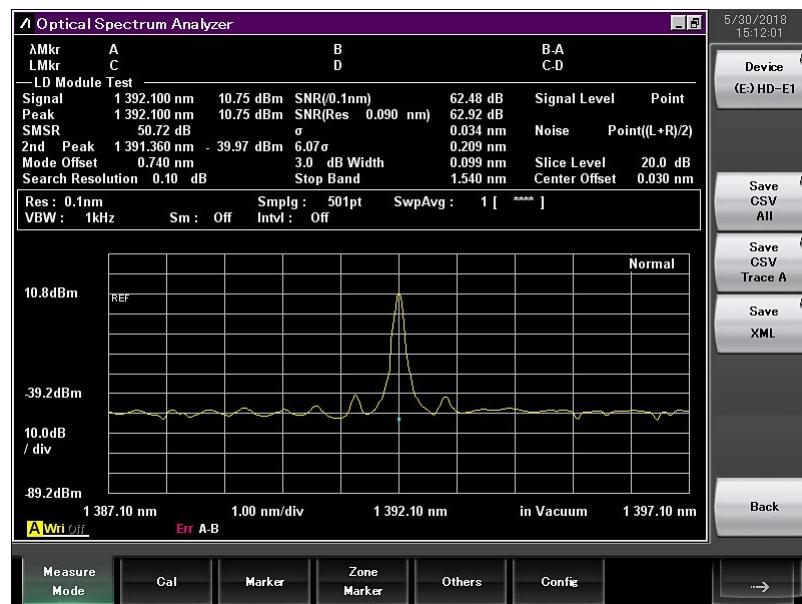


Tuning Characteristics:

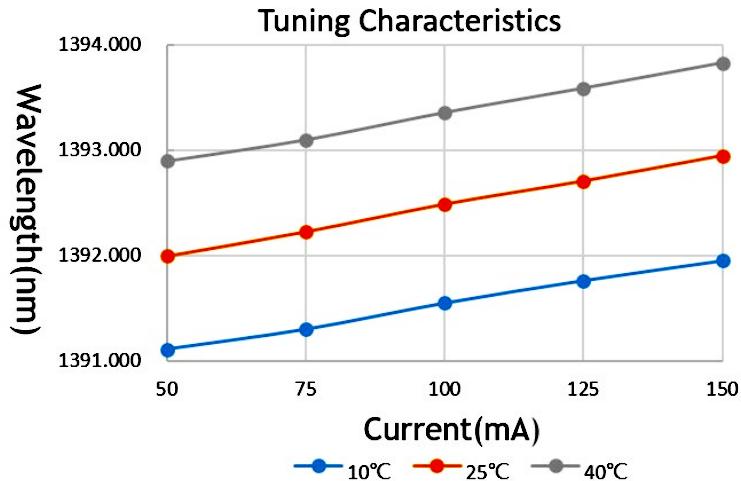

DFB Linewidth Testing Result:

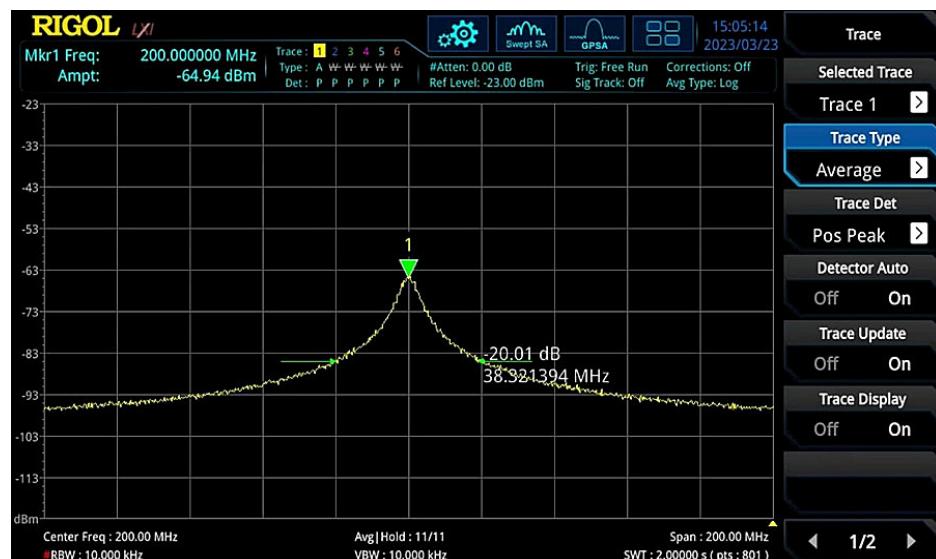


L-I Curve:

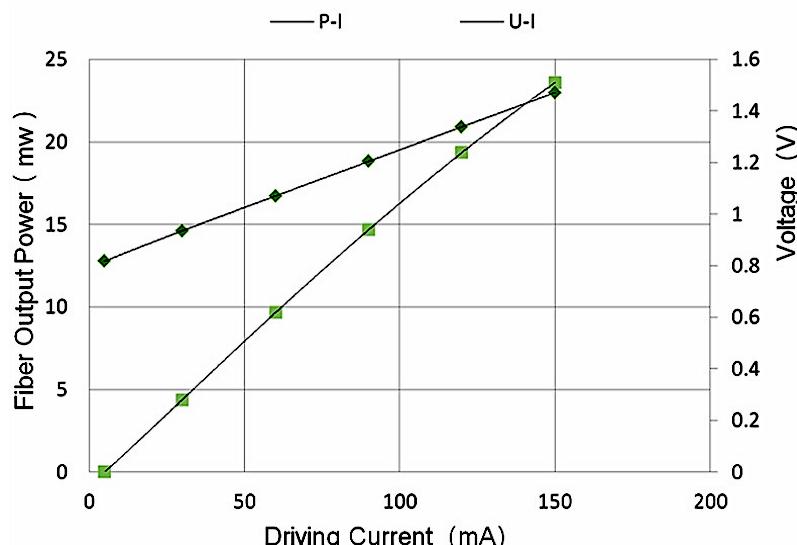


Headquarters: 288, Woolands Loop, #04-00, Singapore 738100


Tuning Characteristics:

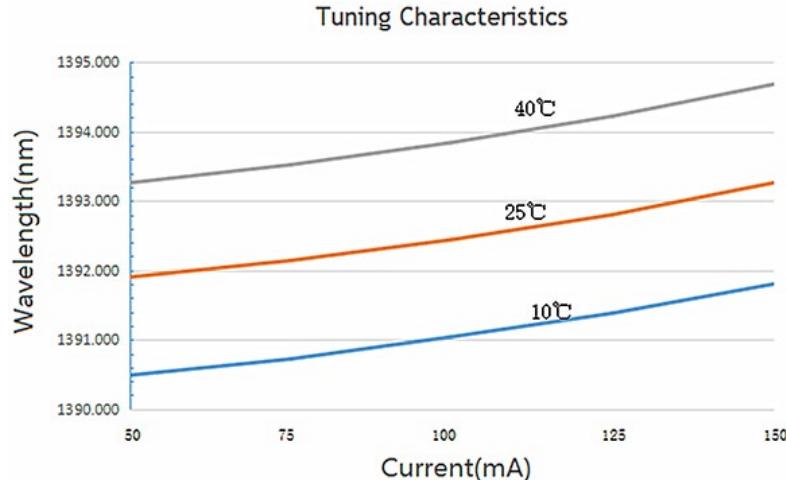


Central Wavelength:

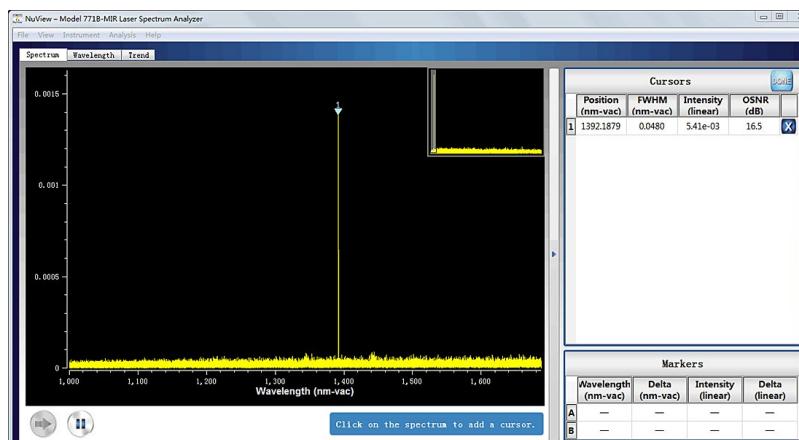


Wavelength Stability:

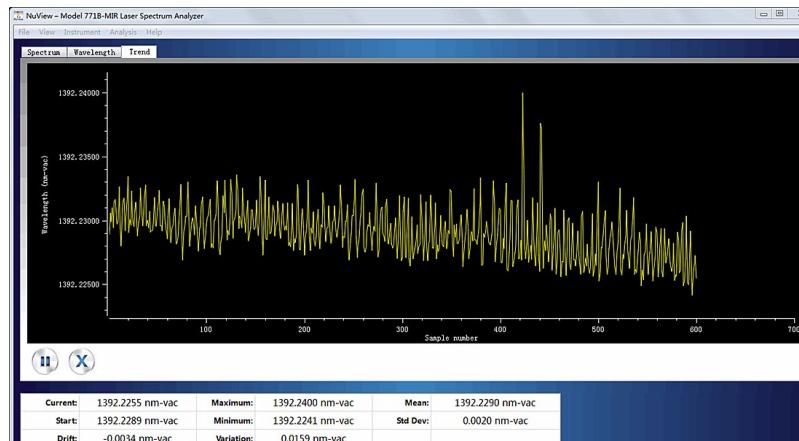


Beam Quality:

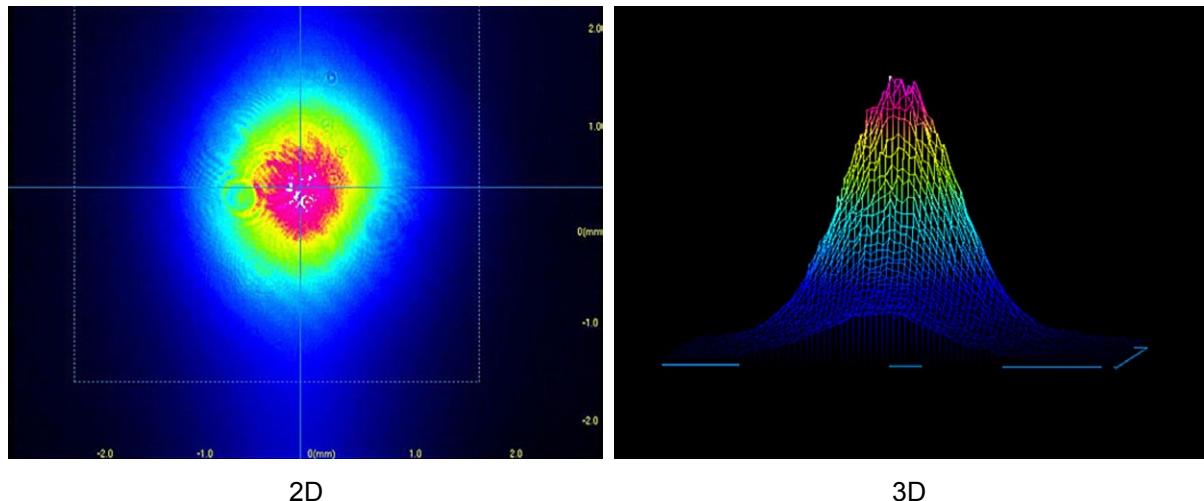

Camera Analysis:

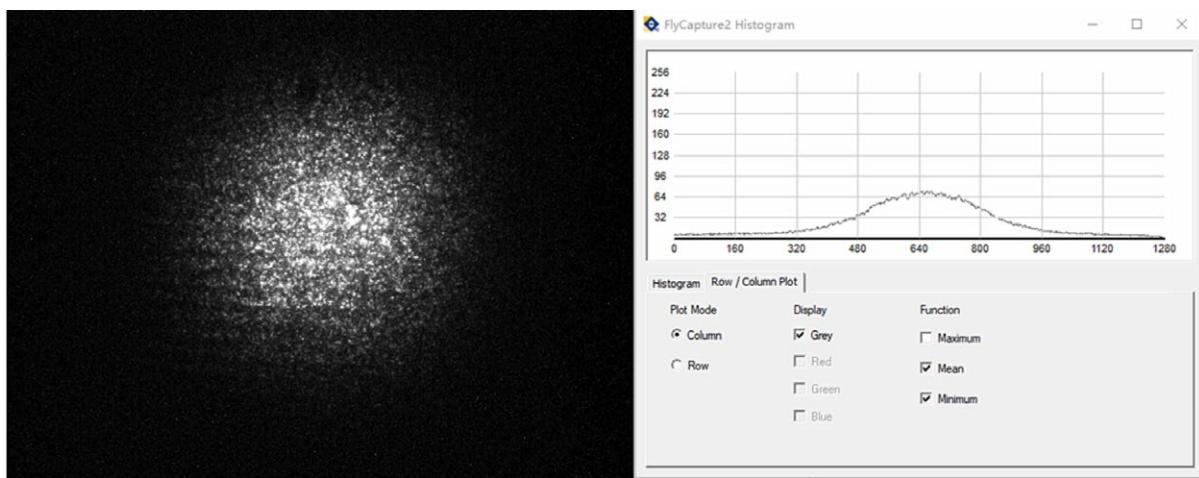




Dimensions and Pin definitions:

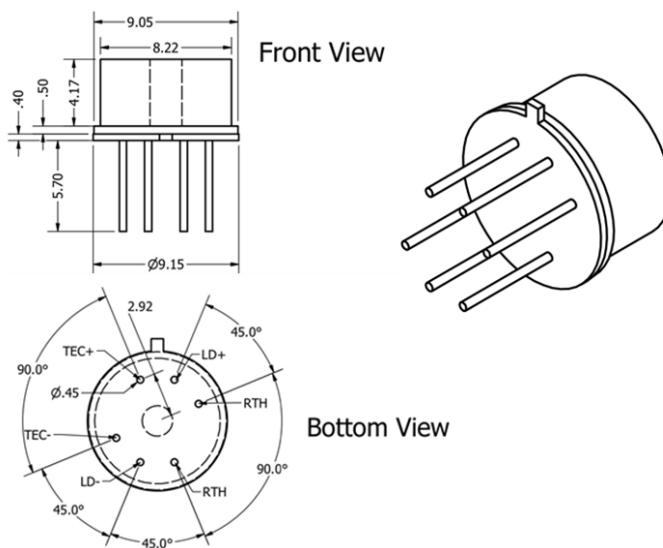

Headquarters: 288, Woolands Loop, #04-00, Singapore 738100

Absolute Maximum Ratings:

| Item | Unit | Min | Typ | Max |
|----------------------|------|-----|-----|-----|
| Case Temperature | °C | -5 | 25 | 70 |
| Chip Temperature | °C | +10 | 25 | 40 |
| Operating Current | mA | 0 | 100 | 120 |
| Forward Voltage | V | 0.8 | 1.2 | 1.8 |
| TEC Current | A | - | - | 1.2 |
| Reverse Voltage (LD) | V | - | - | 2.0 |
| Reverse Voltage (PD) | V | - | - | 20 |

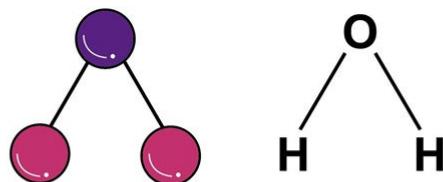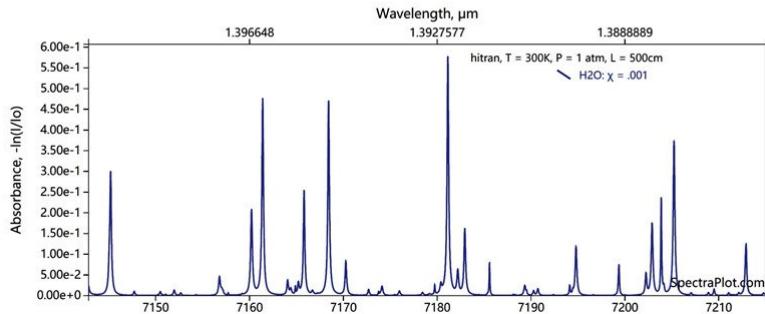H₂O:**TDLAS: 1388/1392/1398nm****Ordering Info:**

PL-DFB-□□□□-★-A8▽-TO39

□□□□: Wavelength

1392: 1392nm

1653.7: 1653.7nm

★ : Output Power

A: 10mW

B: 20mW

▽: Wavelength Tolerance

1: ±1nm

2: ±2nm

Headquarters: 288, Woolands Loop, #04-00, Singapore 738100