


1960nm DFB Tunable Laser diode for N₂O Gas monitoring (TO39 Package)

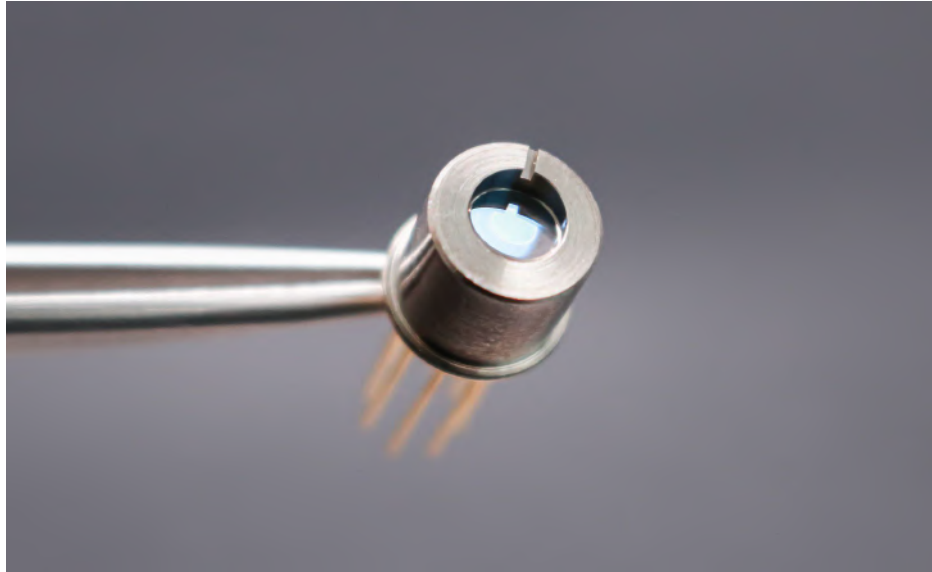

Description

The PL-DFB-1960-A-A81 1960nm DFB laser diode module made by LD-PD is a cost effective, highly coherent laser source. The DFB laser diode chip is packaged in an industry standard hermetically sealed TO39 package with TEC and PD Built in.

Features

- Narrow Linewidth < 2MHz
- Excellent wavelength control and stability
- Industry Standard 14 pin Butterfly package
- Mode-Hop free tuning
- Excellent reliability
- Customer specific wavelengths available

Application


- Tunable diode laser absorption spectroscopy
- N₂O Monitoring




Laser Specifications

Electrical/Optical Characteristics(Tsub=25°C, CW bias unless stated otherwise)


Parameter	Symbol	Min	Typ	Max	Unit
Centre Wavelength	λ	1959	1960	1961	nm
Side Mode Suppression Ratio	SMSR	30	40		dB
Threshold Current	I _{th}		20	30	mA
Operating Current	I _{op}		80	120	mA
Chip output Power	P _f	4	5	6	mW
Quantum Efficiency	η	0.08	0.12		mW/mA
Current Tuning Coefficient	$\Delta\lambda/\Delta I$		0.015		nm/mA
Temperature Tuning Coefficient	$\Delta\lambda/\Delta T$		0.12		nm/K
Forward Voltage	V _f		1.3	2	V
Thermistor Resistance	R _T	9.5	10	10.5	K Ω
Thermistor Temp. Coefficient			-4.4		%/°C
Connector	FC/APC				

Spectrum

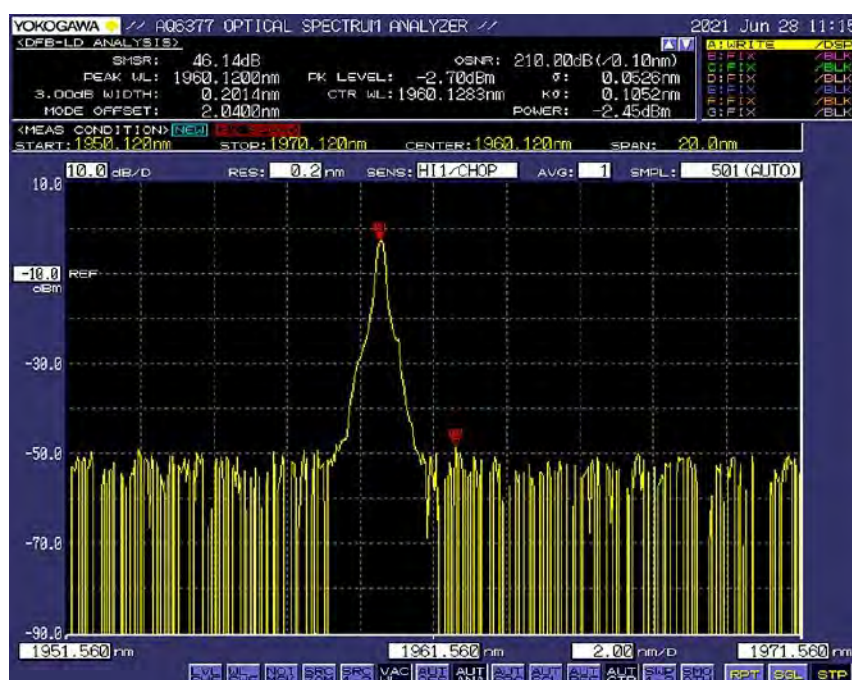


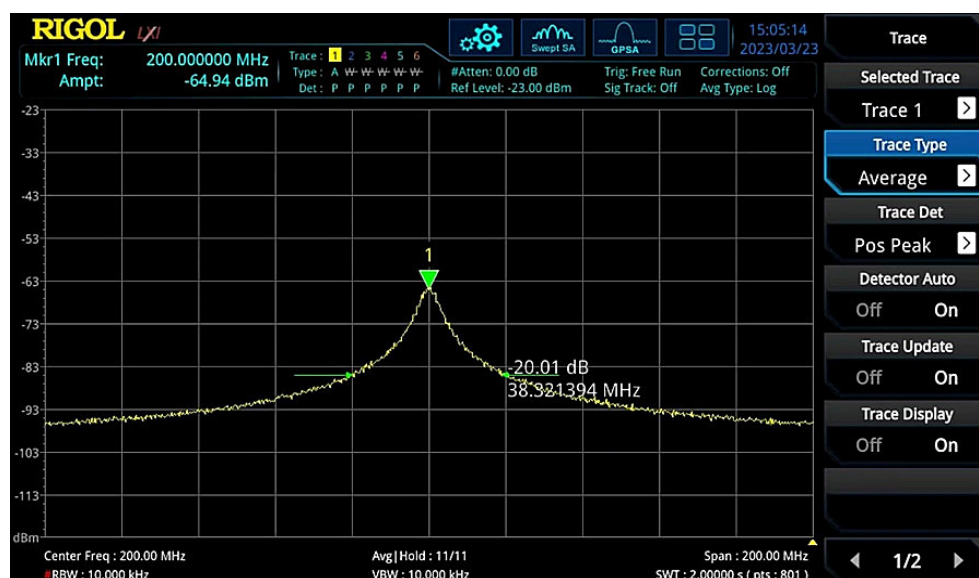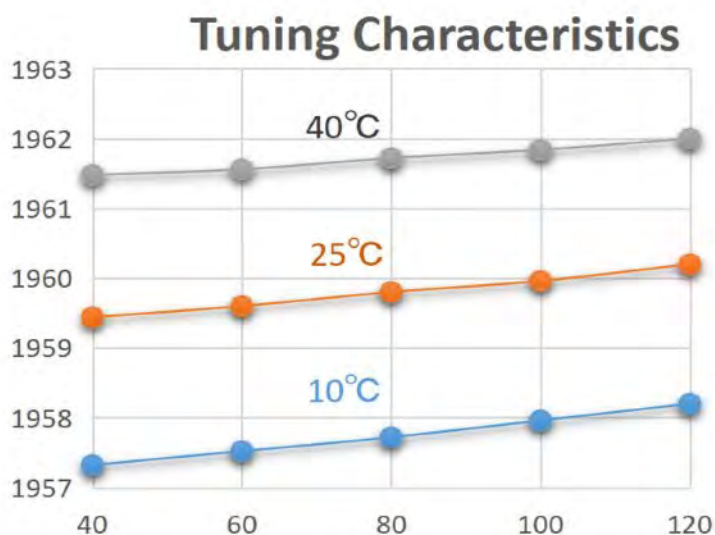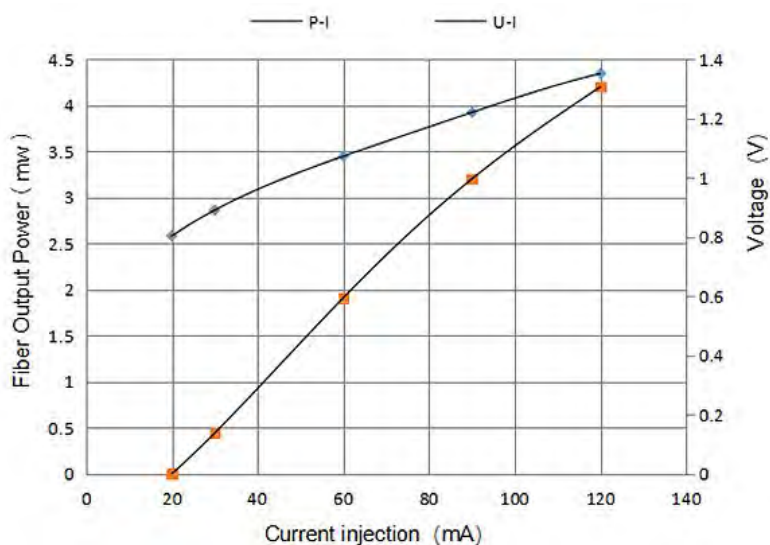


Power Stability

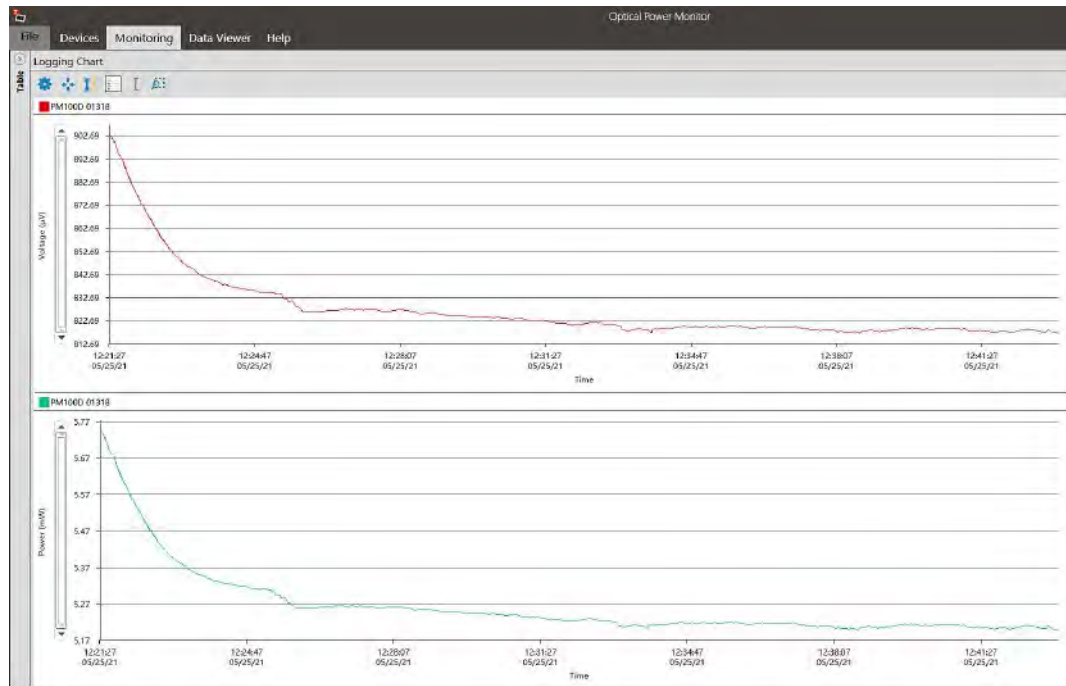

Beam Quality


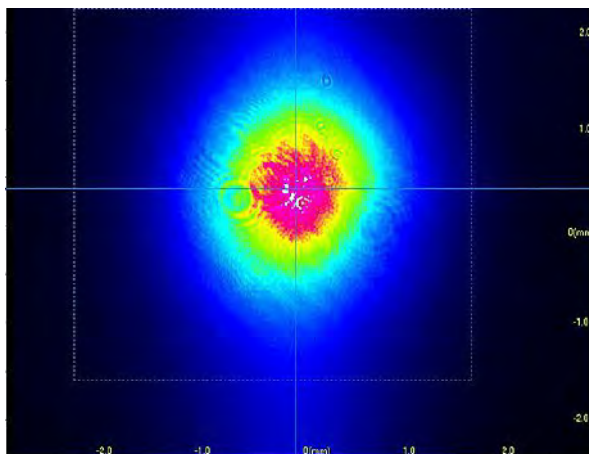


2D

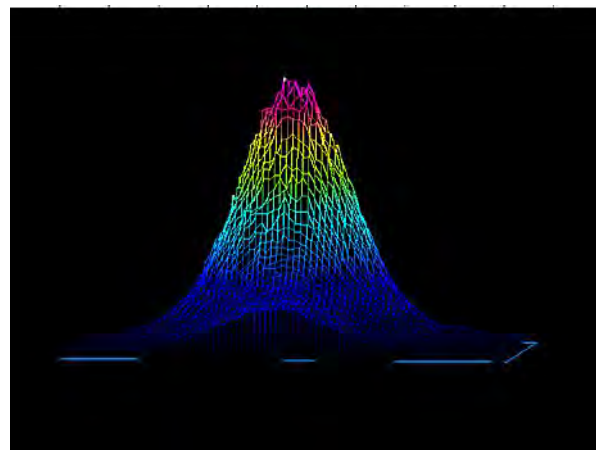


3D

Camera Analysis

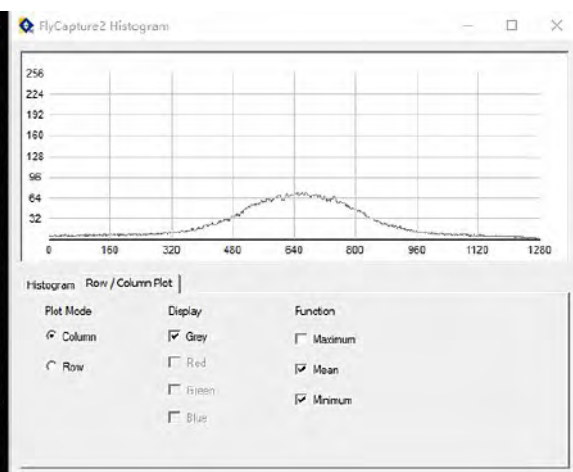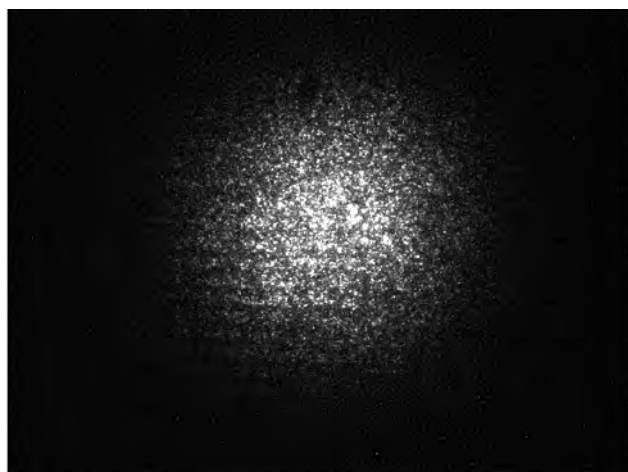

Dimensions and Pin definitions

Uinte (mm)

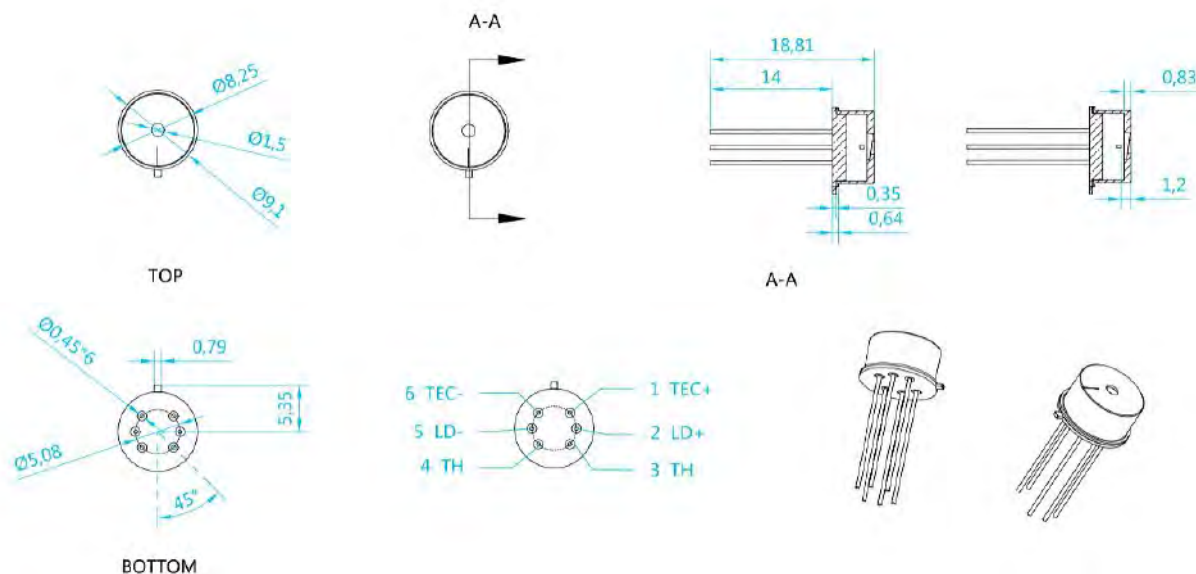

Absolute Maximum Ratings

Item	Unit	Min	Typ	Max
Case Temperature	$^{\circ}\text{C}$	-5	25	70
Chip Temperature	$^{\circ}\text{C}$	+10	25	40
Operating Current	mA	0	100	120
Forward Voltage	V	0.8	1.2	1.8
TEC Current	A	-	-	1.2
Reverse Voltage (LD)	V	-	-	2.0
Reverse Voltage (PD)	V	-	-	20

Ordering Info

PL-DFB-□□□□-☆-A8▽-TO39

□□□□:Wavelength

1530: 1530nm

1653.7: 1653.7nm

1960: 1960nm

☆ :Output Power

A:5mW

B:10mW

▽:Wavelength Tolerance

1: $\pm 1\text{nm}$ 2: $\pm 2\text{nm}$