

3.85 μm Quantum Cascade Laser, 200 mW

QF3850T1




Description

The QF3850T1 laser is a single-spatial-mode, Fabry-Perot quantum cascade laser (QCL) contained in a TO-9 package, designed and manufactured by Thorlabs. This laser operates in continuous wave (CW) mode at room temperature. The laser package is an environmentally sealed module with three pins for electrical connection. The TO can does not contain a monitor photodiode. The emitting surface is protected by an AR-coated sapphire window, and the output beam is divergent. This semiconductor laser is a compact light source suited to many applications.

Specifications

Absolute Maximum Ratings	
LD Reverse Voltage (Max)	1 V
Absolute Max Current	1 A ^a
Absolute Max Power	500 mW
Operating Temperature	15 to 50 °C ^b
Storage Temperature	-40 to 85 °C ^b

- The maximum current for each device may be lower than this value and is specified on a device-by-device basis in the individual datasheets.
- Non-Condensing Environment




QF3850T1 Specifications ^a				
	Symbol	Min	Typical	Max
Center Wavelength	λ_c	3.75 μm	3.85 μm	3.95 μm
Output Power	P_{out}	200 mW	-	-
Operating Current	I_{pp}	-	-	600 mA
Threshold Current	I_{TH}	-	250 mA	-
Forward Voltage	V_F	-	13.5 V	15.0 V
Parallel Beam Divergence Angle (FWHM)	θ_{\parallel}	-	30°	-
Perpendicular Beam Divergence Angle (FWHM)	θ_{\perp}	-	40°	-


- All values are specified at $T_{\text{case}} = 25\text{ °C}$, CW current operation.

Sample Performance Plots


Q3850T1 Sample Output Spectrum

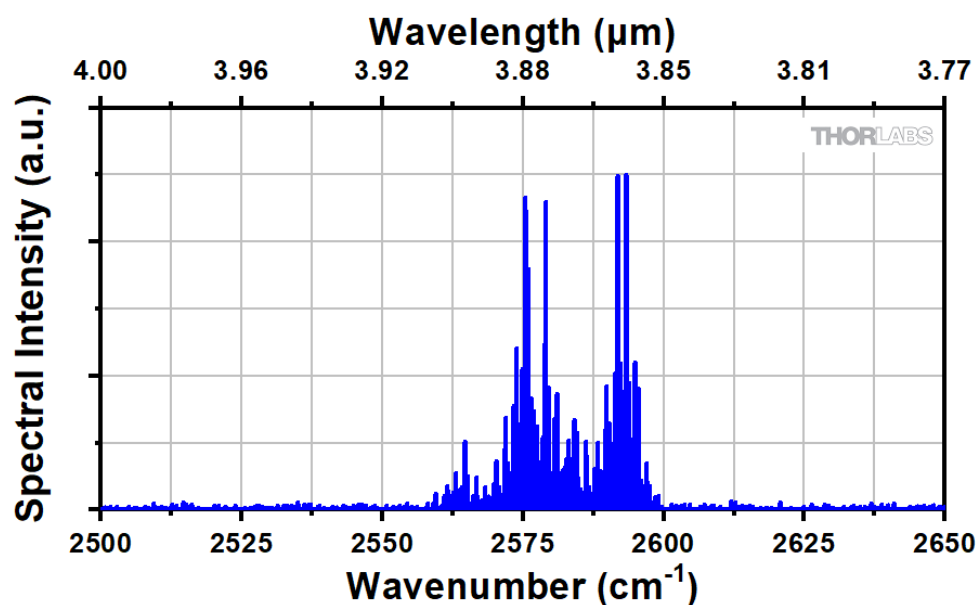

QF3850T1 Sample L-I-V Characteristics

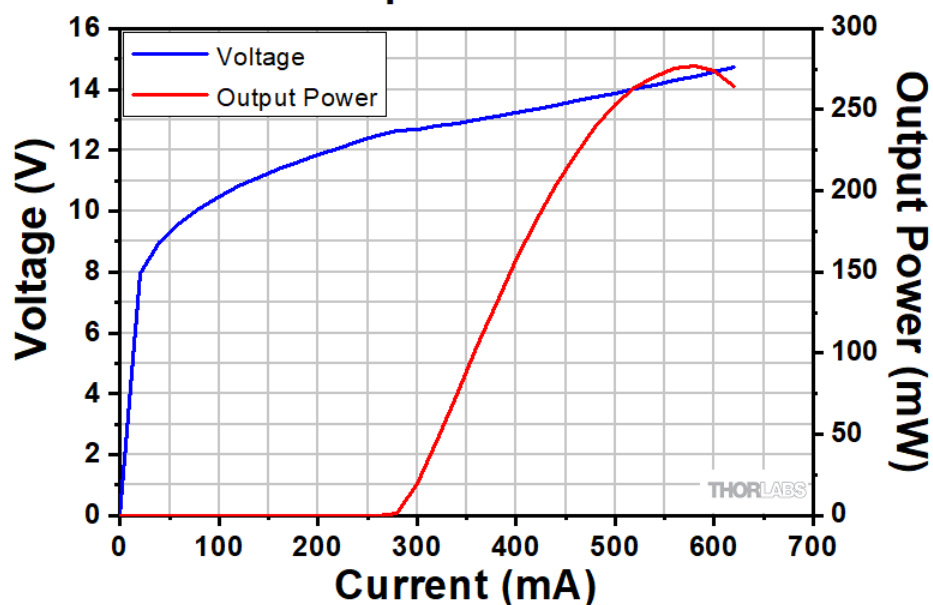


QF3850T1 Sample Far Field

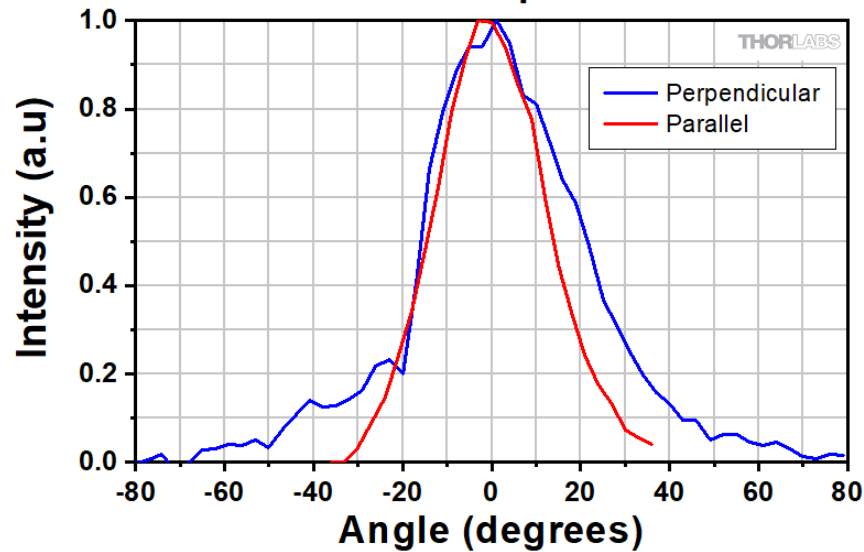


Drawings for QF3850T1


Top View

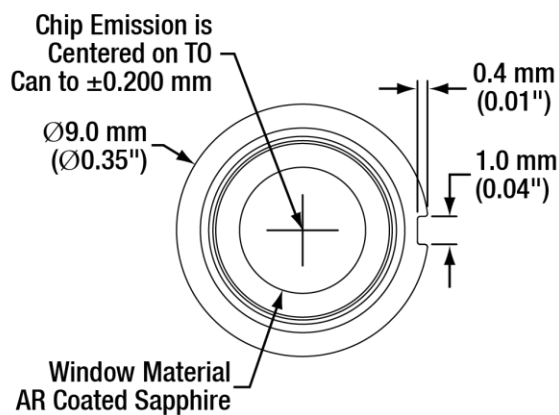

Pin Diagram

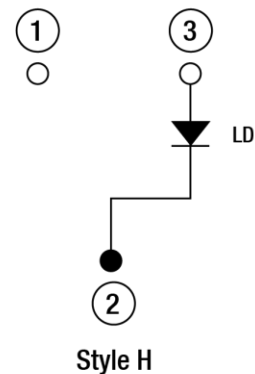

Side View

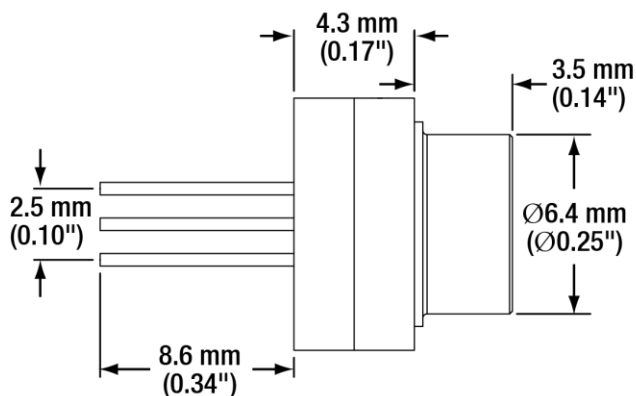

Diode Bottom View

