

808nm, 400μm, Conduction-Cooled, Fiber-Coupled, Multi-Bar Module

Features

- Conduction-cooled diode laser bars inside
- Single wavelength
- High coupling efficiency
- Scalable output power
- Industrial water cooling

Optional Accessories

- Integrated pointer laser and power meter
- Integrated NTC temperature sensor
- Fiber detection sensor



Device Specification

Optical Parameters ¹	Units		
Center Wavelength Range ³	nm	808	
Center Wavelength Tolerance	nm	±3	±3
Output Power ²	W	400	500
Spectral Width (FWHM)	nm	<4	<4
Slope Efficiency	W/A	>8	>10
Wavelength Temp. Coefficient	nm/°C	~0.27	~0.27

Fiber Parameters			
Numerical Aperture	NA	0.22	
Fiber Core Diameter	μm	400	
Fiber Connector		QBH/HighYAG	

Electrical Parameters ¹			
Power Conversion Efficiency	%	>45	>45
Threshold Current (I_{TH})	A	<10	<10
Operating Current (I_{OP})	A	<60	<60
Operating Voltage (V_{OP})	V	<20	<24

Thermal Parameters			
Operating Temperature ^{2, 3, 4} (Cooling Plate)	°C	+20 to +25	
Operating Temperature ^{2, 3, 4} (Diode Laser Module)	°C	+30 to +35	
Storage Temperature ^{3, 4}	°C	0 to +55	
Coolant Flow Rate	l/h	250 to 400	
Operating Water Temperature	°C	+20 to +25	
Maximum Particle Size	μm	<10	
Recommended Cooling Capacity	W	>800	>940

¹Data at 20°C cold plate temperature, unless otherwise stated.

²Reduced lifetime if used above nominal operating conditions.


³Others available upon request.

⁴A non-condensing environment is required for storage and operation below the ambient dew point.

808nm, 400µm, Conduction-Cooled, Fiber-Coupled, Multi-Bar Module

DILAS
The diode laser company.

Package Dimension

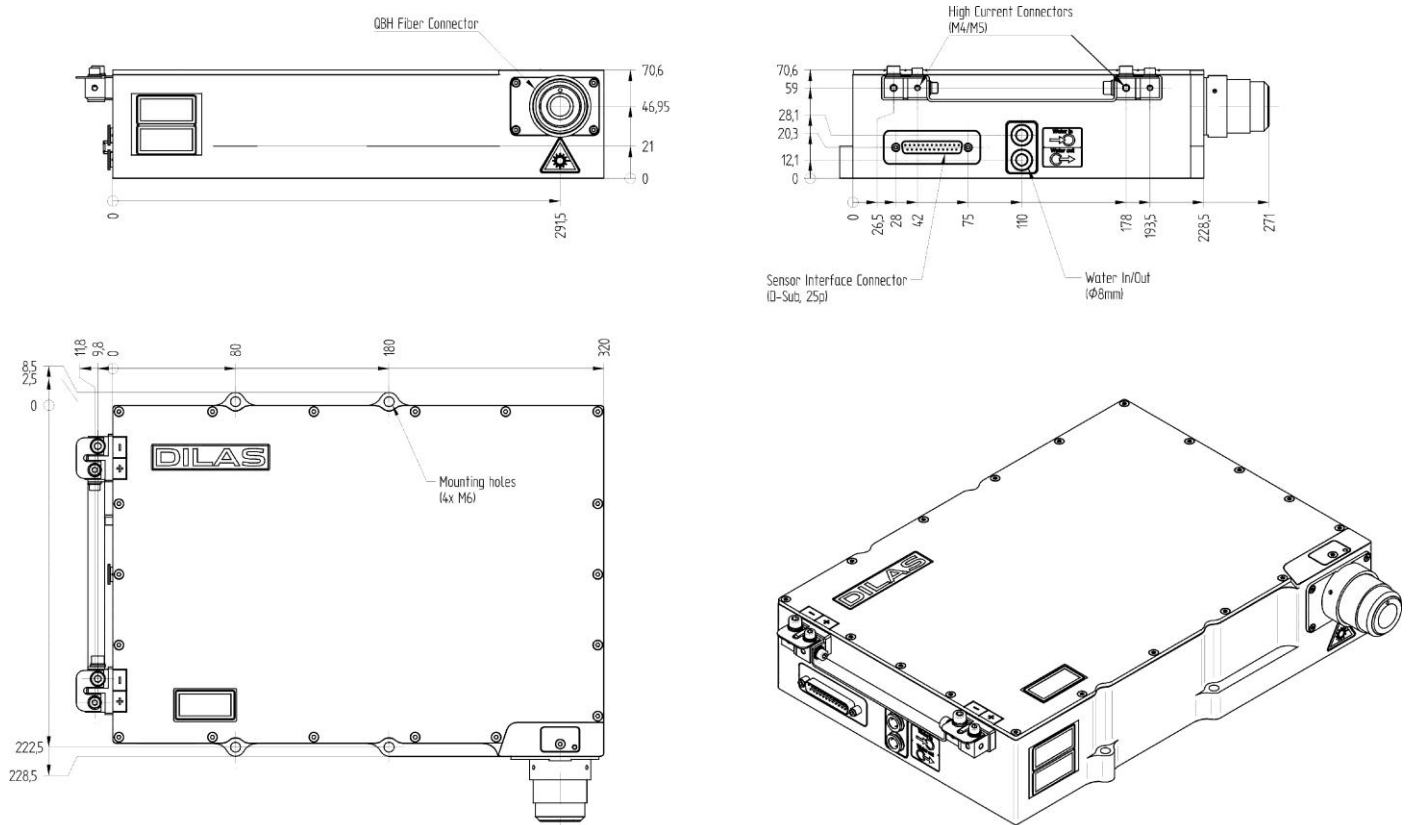

©2012 DILAS. All rights reserved. DILAS reserves the right to change products specifications without notice. For handling precautions, please reference the general handling instruction manual.

For complete details, please contact your local DILAS sales representative or visit our website at www.DILAS.com.

Europe

DILAS Diodenlaser GmbH
Galileo-Galilei-Straße 10
55129 Mainz
Germany

Phone: +49 (0)6131 9226 0
Fax: +49 (0)6131 9226 257
Email: sales@DILAS.de

North America

DILAS Diode Laser, Inc.
9070 South Rita Road
Suite 1500
Tucson, AZ 85747

Phone: +1 (520) 232-3480
Fax: +1 (520) 232-3499
Email: sales@DILAS-INC.com

China & Taiwan

DILAS Diodenlaser GmbH
China Sales Office
Room 206, Sunplus Technology, Bldg. 2
No. 1077 Zu Chongzhi Road
Hi-Tech Park, Shanghai 201203,
P.R. China
Phone: +86 (0) 21-6855-2216
Fax: +86 (0) 21-5027-3793
Email: sales@dilas-china.com.cn