

Laser Diode



L780P010



Description

Thorlabs Ø5.6 mm, TO-18 can package discrete laser diode is a compact light source suited to many application. Our lasers are fully compatible with our entire line of Laser Diode and TEC Controllers as well as our selection of Laser Diode Mounts and Collimation Solutions.

Specifications

Specification	Symbol	Max
Optical Output Power, mW	P_o	12
LD Reverse Voltage, V	$V_{R(LD)}$	2
PD Reverse Voltage, V	$V_{R(PD)}$	30
Operation Case Temperature, °C	T_{op}	-10 to 60
Storage Temperature, °C	T_{STG}	-40 to 85


($P_o = 10$ mW, $T_c = 25$ °C)

Specification	Symbol	Min	Typ	Max
Threshold Current, mA	I_{th}		14	20
Operation Current, mA	I_{op}		24	40
Operating Voltage, V	V_{op}		1.8	2.5
Lasing Wavelength, nm	λ_p	770	780	790
Beam Divergence	$\theta_{//}$	6°	8°	12°
Beam Divergence	$\theta_{\perp}$	25°	30°	32°
Slope Efficiency, mW/mA	η	0.5	0.65	0.9
Monitor Current, mA	I_m	0.3	0.7	1.5
Astigmatism, μ m	A_s		10	15


Drawings




Top View

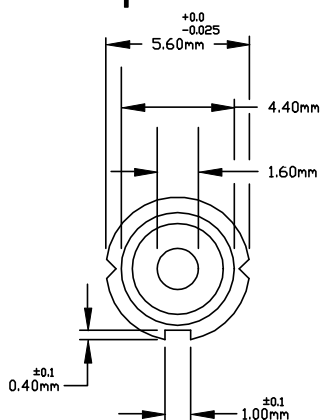

Side View

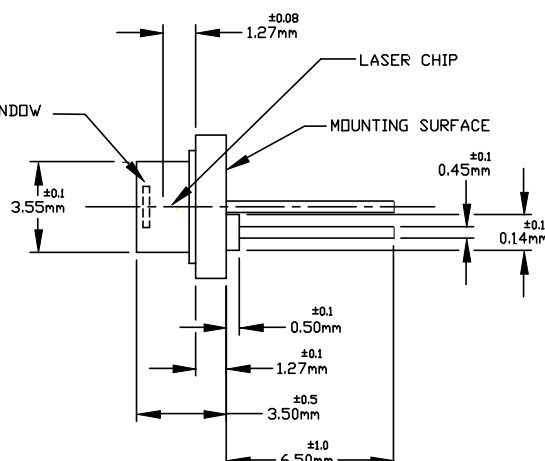

Bottom View

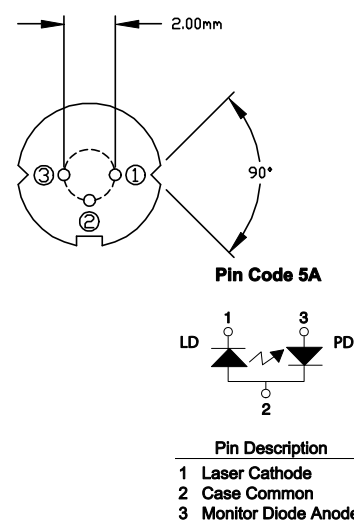

USA, Canada, & S. America
Thorlabs, Inc.
56 Sparta Ave
Newton, NJ 07860, USA
Tel: 973-300-3000
Fax: 973-300-3600
www.thorlabs.com
email: sales@thorlabs.com

Europe
Thorlabs GmbH
Hans-Böckler-Str. 6
85221 Dachau, Germany
Tel: +49-(0)8131-5956-0
Fax: +49-(0)8131-5956-99
www.thorlabs.com
email: Europe@thorlabs.com

UK and Ireland
Thorlabs LTD.
1 Saint Thomas Place, Ely
Cambridgeshire CB7 4EX, GB
Tel: +44 (0)1353-654440
Fax: +44 (0)1353-654444
www.thorlabs.com
email: sales.uk@thorlabs.com

Scandinavia
Thorlabs Sweden AB
Bergfötagatan 7
431 35 Mölndal, Sweden
Tel: +46-31-733-30-00
Fax: +46-31-703-40-45
www.thorlabs.com
email: scandinavia@thorlabs.com

Japan and Asia
Thorlabs Japan, Inc.
3-6-3 Kitamachi
Nerima-ku, Tokyo 179-0081, Japan
Tel: +81-3-6915-7701
Fax: +81-3-6915-7716
www.thorlabs.co.jp
Email: sales@thorlabs.jp

