


QF4050D2



Description

The QF4050D2 is a single spatial mode, Fabry-Perot Quantum Cascade Laser designed and manufactured by Thorlabs. This laser operates in continuous wave (CW) mode at room temperature. The QF4050D2 is mounted on an open heatsink D-mount package with both the cathode and anode isolated from the heatsink base. This discrete semiconductor laser is a compact light source suited to many applications. A thermistor is integrated for temperature monitoring. There is no monitor photodiode.

Specifications

General Specifications	
LD Reverse Voltage (Max)	1 V
PD Reverse Voltage (Max)	N/A
Absolute Max Current	Varies Between Devices ^a
Absolute Max Power	1300 mW
Operating Temperature	15 to 50 °C ^b
Storage Temperature	-40 to 85 °C ^b





- a. The absolute maximum current is determined on a device-by-device basis and is listed on the device's data sheet.
b. Non-Condensing Environment

Optical/Electrical Specifications ^c				
	Symbol	Min	Typical	Max
Center Wavelength	λ_c	3.90 μm	4.05 μm	4.20 μm
Spectral Bandwidth (5 - 95% Integrated Power)	$\Delta\lambda$	-	60 nm	-
Output Power	P_{out}	0.8 W	-	-
Operating Current	I_{op}	-	750 mA	1300 mA
Threshold Current	I_{TH}	-	350 mA	-
Forward Voltage	V_F	-	13 V	15 V
Slope Efficiency	$\Delta P / \Delta I$	-	1.8 W/A	-
Perpendicular Beam Divergence Angle (FWHM)	$\theta_{\perp}$	-	40°	-
Parallel Beam Divergence Angle (FWHM)	$\theta_{\parallel}$	-	30°	-
Thermistor Resistance ^d	R_T	-	10 k Ω	-
Steinhart-Hart Coefficients	A	-	$1.129 \times 10^{-3} \text{ K}^{-1}$	-
	B	-	$2.341 \times 10^{-4} \text{ K}^{-1}$	-
	C	-	$0.878 \times 10^{-7} \text{ K}^{-1}$	-


c. T = 25 °C, CW Current Operation

d. Thermistor Resistance follows the Steinhart-Hart Equation: $\frac{1}{T} = A + B \ln(R_{TH}) + C(\ln R_{TH})^3$.

Performance Plots

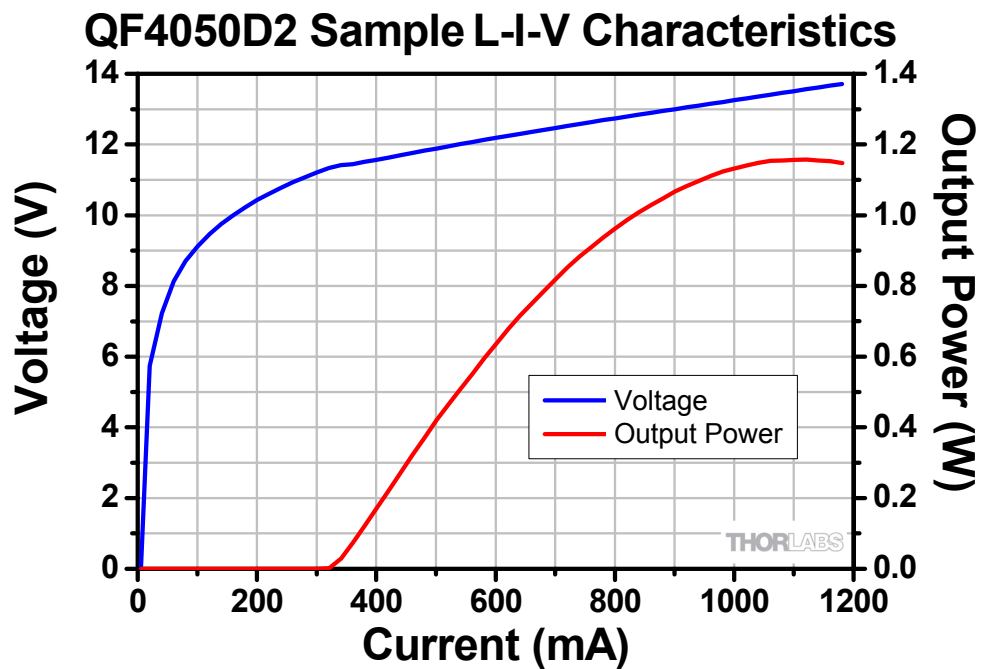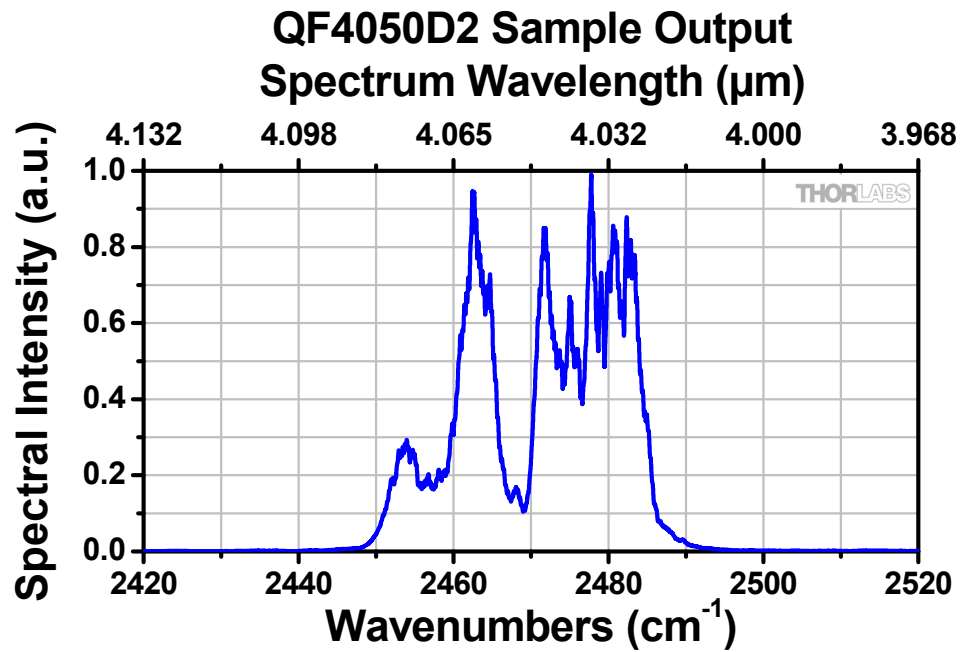

QD4050D2 Sample Far Field

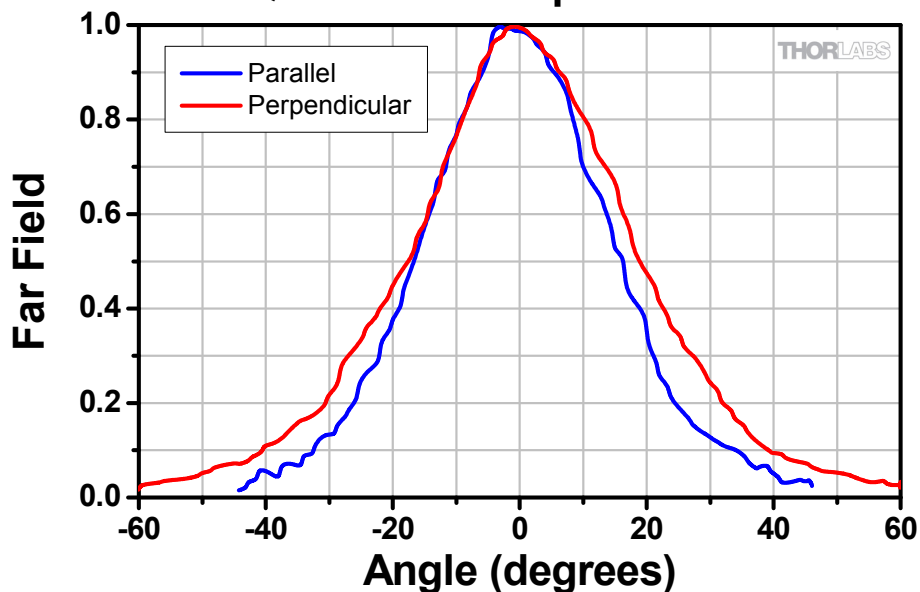

Drawings for QF4050D2

