

## 635nm 30mW 50°C Reliable Operation

### Features


High visibility  
High ESD Level

### Applications

Industrial laser markers  
Survey and engineering instruments  
High visibility LD display  
Lighting show

### Absolute maximum ratings

Parameter	Symbol	Condition	Rating	Unit
Light output power	$P_O$	CW	35	mW
Reverse voltage (LD)	$V_{RL}$	-	2	V
Case temperature	$T_C$	-	-10~+50	°C
Storage temperature	$T_S$	-	-40~+85	°C

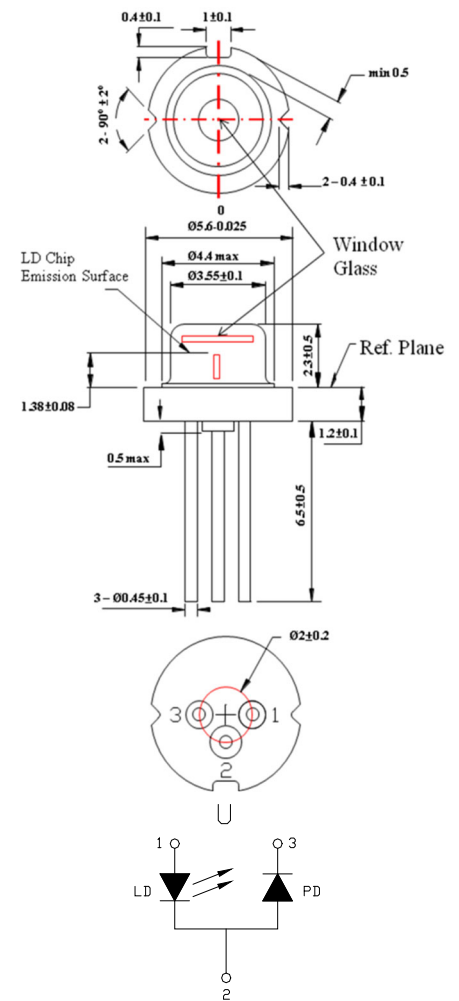

### Electrical and optical characteristics ( $T_c=25^\circ\text{C}$ )

Parameter	Symbol	Min.	Typ.	Max.	Unit	Conditions
Peak wavelength	$\lambda$	630	639	645	nm	$P_o=30\text{ mW}$
Threshold current	$I_{th}$	-	50	70	mA	
Operating current	$I_{op}$	-	95	110	mA	$P_o=30\text{ mW}$
Operating voltage	$V_{op}$	-	2.2	2.7	V	$P_o=30\text{ mW}$
Differential efficiency	$\eta$	0.3	0.6	0.9	mW/mA	$P_o=25\text{-}30\text{mW}$
Monitor current	$I_m$	0.05	0.15	0.3	mA	$P_o=30\text{mW}$
Parallel divergence angle	$\theta_{//}$	5	8	12	deg.	$P_o=30\text{ mW}$
Perpendicular divergence angle	$\theta_{\perp}$	25	30	35	deg.	
Parallel FFP deviation angle	$\Delta\theta_{//}$	-3	0	+3	deg.	
Perpendicular FFP deviation angle	$\Delta\theta_{\perp}$	-3	0	+3	deg.	
Emission point accuracy	$\Delta x\Delta y\Delta z$	-80	0	+80	um	

### Precautions

- \* Do not operate the device above maximum ratings. Doing so may cause unexpected and permanent damage to the device.
- \* Take precautions to avoid electrostatic discharge and/or momentary power spikes. A change in the characteristics of the laser or premature failure may result.
- \* Proper heat sinking of the device assures stability and lifetime. Always ensure that maximum operating temperatures are not exceeded.
- \* Observing visible or invisible laser beams with the human eye directly, or indirectly, can cause permanent damage. Use a camera to observe the laser.
- \* No laser device should be used in any application or situation where life or property is at risk in event of device failure.
- \* Specifications are subject to change without notice. Ensure that you have the latest specification by contacting us prior to purchase or use of the product.

### ARIMA LASERS CORP.

PHONE: 886-3-4699800 | FAX: 886-3-4699600

E-MAIL: Ldsales@arimalasers.com | www.arimalasers.com

For reference only. Contents above are subject to change without notice.

## 635nm 30mW 50°C Reliable Operation

