High Power Laser Diode TO-Cans



Part Number: TO56s-267

High Power Triple Junction TO56 Package Multi-Mode Fabry-Perot Pulsed Wavelength at 1550nm Lensed Options Available

Features

- High Output Power
- High Dynamic Range
- High Efficiency
- Standard TO56
- Cost Effective

Application

- Professional Medical
- Home Use Medical
- Laser Range Finder
- Target Illumination
- Military Systems
- TOF LiDAR for Automotive and Drones
- Telecom OTDR
- Optical Comm



SemiNex delivers the highest available power at infrared wavelengths between 12xx and 19xx nm. When necessary, we will further optimize the design of our InP & GaSb laser chips to meet our customers' specific optical and electrical performance needs. Diodes, bars and packages are tested to meet customer and market performance demands. Typical results and packaging options are shown. Contact SemiNex for additional details or to discuss your specific requirements.



Specification

Optical	Symbol	Тур.	Units
Center Wavelength	λ _c	1550	nm (±20)
Output Power (<10ns)*	Pout	100	Watts (±10%)
Output Power (150ns)*	Pout	75	Watts (±10%)
Emitter Width	W	350	μm
Spectral Width FWHM	Δλ	22	nm
Slope Efficiency	η	1	W/A
Fast Axis Div.	Θ⊥	28	deg FWHM
Slow Axis Div.	Θ _{II}	12	deg FWHM
Electrical	Symbol		Units
Power Conversion Eff.	η	7.4	%
Operating Current (<10ns)	lop	100	А
perating Current (150ns)	l _{op}	75	А
Threshold Current	Ітн	2	А
Operating Voltage	V _{op}	12	V
Duty Cycle	DC	0.1	%
Mechanical	Symbol	Range	Units
o ·· + **		10 to C0	°C
Operating Temp.**		-40 to 60	L

TO56s-267

*Specified values are rated at a constant heat sink temperature of 20°C. **High temperature operation will reduce performance and MTTF. Unless otherwise indicated all values are nominal.

*Available Lenses & Caps

Part Number	Description
TO56s-267-126	TO-56 Cap Lens Matched f=171um, 2.8mm lg







High Power Laser Diode TO-Cans

SemiNex Laser Diodes TO56s-267

Graphs & Data







*Tested with 150nsec pulse @ 0.1% Duty Cycle







High Power Laser Diode TO-Cans



Mechanical Drawing TO56s-267



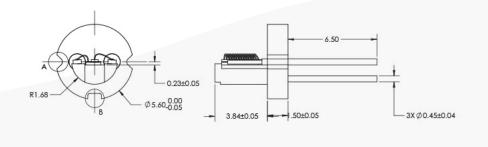



All statements, technical information and recommendations related to the product herein are based upon information believed to be reliable or accurate. The accuracy or completeness herein is not guaranteed, and no responsibility is assumed for any inaccuracies. The user assumes all risks and liability whatsoever in connection with the use of a product or its application. SemiNex Corporation reserves the right to change at any time without notice the design, specification, deduction, fit or form of its described herein, including withdrawal at any time of a product offered for sale herein. Users are encouraged to visit www.seminex.com for the latest data. SemiNex Corporation makes no representations that the products herein are free from any intellectual property claims of others. Please contact SemiNex for more information. 2024 SemiNex Corporation








Mechanical Drawing TO56s-267-126



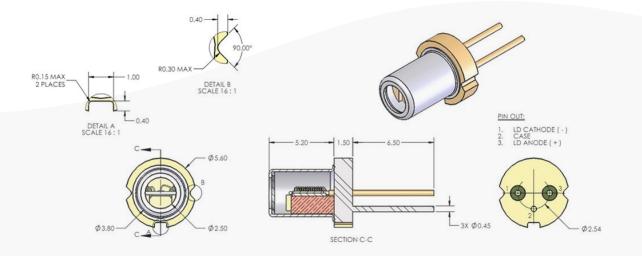

All statements, technical information and recommendations related to the product herein are based upon information believed to be reliable or accurate. The accuracy or completeness herein is not guaranteed, and no responsibility is assumed for any inaccuracies. The user assumes all risks and liability whatsoever in connection with the use of a product or its application. SemiNex Corporation reserves the right to change at any time without notice the design, specification, deduction, fit or form of its described herein, including withdrawal at any time of a product offered for sale herein. Users are encouraged to visit www.seminex.com for the latest data. SemiNex Corporation makes no representations that the products herein are free from any intellectual property claims of others. Please contact SemiNex for more information. 2024 SemiNex Corporation

