

850nm 5mW 50°C Reliable Operation

Features

1. Low operating current
2. Cost effective

Applications

1. Bar-code scanner
2. Laser printer
3. Military

Absolute maximum ratings

Parameter	Symbol	Condition	Rating	Unit
Light output power	P_O	CW	7	mW
Reverse voltage (LD)	V_{RL}	-	2	V
Reverse voltage (PD)	V_{RD}	-	30	V
Forward current (PD)	I_{FD}	-	10	mA
Case temperature	T_C	-	-10~+50	°C
Storage temperature	T_S	-	-40~+85	°C

Electrical and optical characteristics ($T_c=25^\circ\text{C}$)

Parameter	Symbol	Min.	Typ.	Max.	Unit	Conditions
Peak wavelength	λ	840	845	850	nm	$P_O=5\text{ mW}$
Threshold current	I_{th}	-	19	25	mA	
Operating current	I_{op}	-	26	35	mA	$P_O=5\text{ mW}$
Operating voltage	V_{op}	-	1.8	2.0	V	$P_O=5\text{ mW}$
Differential efficiency	η	0.5	0.9	1.1	mW/mA	$P_O=3\text{-}5\text{mW}$
Monitor current	I_m	0.4	0.6	0.8	mA	$P_O=5\text{mW}, V_{RD}=5\text{V}$
Parallel divergence angle	$\theta_{//}$	6	9	14	deg.	$P_O=5\text{ mW}$
Perpendicular divergence angle	$\theta_{\perp}$	27	32	36	deg.	
Parallel FFP deviation angle	$\Delta\theta_{//}$	-3	-	+3	deg.	
Perpendicular FFP deviation angle	$\Delta\theta_{\perp}$	-3	-	+3	deg.	
Emission point accuracy	$\Delta x\Delta y\Delta z$	-80	-	+80	um	

• Precautions


- * Do not operate the device above maximum ratings. Doing so may cause unexpected and permanent damage to the device.
- * Take precautions to avoid electrostatic discharge and/or momentary power spikes. A change in the characteristics of the laser or premature failure may result.
- * Proper heat sinking of the device assures stability and lifetime. Always ensure that maximum operating temperatures are not exceeded.
- * Observing visible or invisible laser beams with the human eye directly, or indirectly, can cause permanent damage. Use a camera to observe the laser.
- * No laser device should be used in any application or situation where life or property is at risk in event of device failure.
- * Specifications are subject to change without notice. Ensure that you have the latest specification by contacting us prior to purchase or use of the product.

ARIMA LASERS CORP.

PHONE: 886-3-4699800 | FAX: 886-3-4699600

E-MAIL: Ldsales@arimalasers.com | www.arimalasers.com

For reference only. Contents above are subject to change without notice.

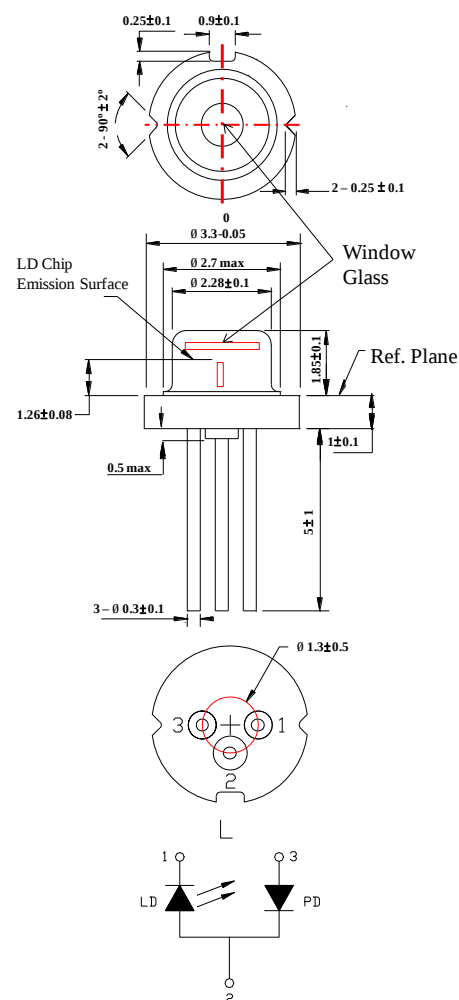

850nm 5mW 50°C Reliable Operation

